

ADQ500-48S12

500 Watts Quarter Brick Converter


Total Power: 500 Watts
Input Voltage: 36 to 75 Vdc
of Outputs: Single
Main output: 12V dc

Special Features

- Delivering up to 42A output
- Ultra-high efficiency 95.5% typ. at half load
- Wide input range: 36V ~ 75V
- Startup Pre-bias: 0%Vout ~ 95%Vout
- Excellent thermal performance
- No minimum load requirement
- RoHS2.0(2011/65/EU)
- Remote control function (negative or positive logic optional)
- Remote output sense
- Trim
- PMBus Rev.1.2 Compliance
- Input under voltage lockout
- Output over current protection
- Output over voltage protection
- Over temperature protection
- Industry standard quarter brick pin-out outline
- Pin length option: 3.8mm

Safety

IEC/EN/UL/CSA 62368
CE Mark
UL/TUV
UL94,V-0

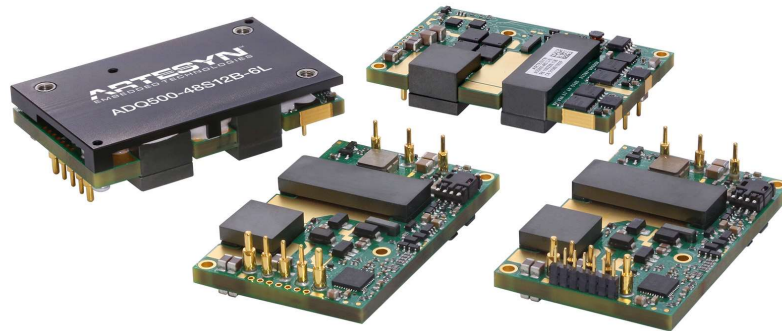

Product Descriptions

The ADQ500-48S12 is a single output DC/DC converter with standard quarter brick form factor and pin configuration. It delivers up to 42A output current with 12V output. Ultra-high 95.5% efficiency and excellent thermal performance makes it an ideal choice for use in computing and telecommunication applications and can operate over an ambient temperature range of -40 °C ~ +85 °C.

Applications

Telecom/ Datacom

Model Numbers

| Standard | Output Voltage | Structure | Remote ON/OFF logic | RoHS Status | PMBus |
|--------------------|----------------|------------|---------------------|---------------------|-------|
| ADQ500-48S12-6L | 12Vdc | Open-frame | Negative | RoHS2.0(2011/65/EU) | N |
| ADQ500-48S12B-6L | 12Vdc | Baseplate | Negative | RoHS2.0(2011/65/EU) | N |
| ADQ500-48S12-6LI | 12Vdc | Open-frame | Negative | RoHS2.0(2011/65/EU) | Y |
| ADQ500-48S12B-6LI | 12Vdc | Baseplate | Negative | RoHS2.0(2011/65/EU) | Y |
| ADQ500-48S12B-6LK | 12Vdc | Baseplate | Negative | RoHS2.0(2011/65/EU) | N |
| ADQ500-48S12B-6LA | 12Vdc | Baseplate | Negative | RoHS2.0(2011/65/EU) | N |
| ADQ500-48S12PB-6L | 12Vdc | Baseplate | Positive | RoHS2.0(2011/65/EU) | N |
| ADQ500-48S12PB-6LI | 12Vdc | Baseplate | Positive | RoHS2.0(2011/65/EU) | Y |

Ordering information

| | | | | | | | | | | | |
|--------|---|----|---|----|---|---|---|---|---|---|----|
| ADQ500 | - | 48 | S | 12 | P | B | - | 6 | L | I | K |
| 1 | | 2 | 3 | 4 | 5 | 6 | | 7 | 8 | 9 | 10 |

| | | |
|----|----------------------|--|
| 1 | Model series | ADQ: high efficiency quarter brick series, 500: output power 500W |
| 2 | Input voltage | 48: 36V ~ 75V input range, rated input voltage 48V |
| 3 | Output number | S: single output |
| 4 | Rated output voltage | 12: 12V output |
| 5 | Remote ON/OFF logic | Default: negative logic; P: positive logic |
| 6 | Baseplate | B: with baseplate; default: open frame |
| 7 | Pin length | Omit for 5.8mm ± 0.25mm 4: 4.8mm ± 0.25mm 6: 3.80mm ± 0.25mm 8: 2.80mm ± 0.25mm |
| 8 | RoHS status | Y: RoHS, R5; L: RoHS, R6 |
| 9 | PMBus | Omit: No PMBus I: Support PMBus |
| 10 | Customer Code | |

Options

Positive enable optional

Pin length optional

Electrical Specifications

Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply’s reliability.

Table 1. Absolute Maximum Ratings:

| Parameter | Model | Symbol | Min | Typ | Max | Unit |
|--|-------|-------------|------|-----|------|------|
| Input Voltage Operating -Continuous Non-operating -100mS | All | $V_{IN,DC}$ | - | - | 80 | Vdc |
| | | | - | - | 100 | Vdc |
| Maximum Output Power | All | $P_{O,max}$ | - | - | 500 | W |
| Ambient Operating Temperature | All | T_A | -40 | - | +85 | °C |
| Storage Temperature | All | T_{STG} | -55 | - | +125 | °C |
| Voltage at remote ON/OFF pin | All | | -0.3 | - | 18 | Vdc |
| Humidity (non-condensing) Operating Non-operating | All | | - | - | 95 | % |
| | All | | - | - | 95 | % |

Input Specifications

Table 2. Input Specifications:

| Parameter | Condition ¹ | Symbol | Min | Typ | Max | Unit |
|--|---|--------------|-----|----------|-----|-------------------|
| Operating Input Voltage, DC | All | $V_{IN,DC}$ | 36 | 48 | 75 | Vdc |
| Turn-on Voltage Threshold | $I_O = I_{O,max}$ | $V_{IN,ON}$ | - | 35 | - | Vdc |
| Turn-off Voltage Threshold | $I_O = I_{O,max}$ | $V_{IN,OFF}$ | - | 33 | - | Vdc |
| Lockout Voltage Hysteresis | $I_O = I_{O,max}$ | | - | 2 | - | Vdc |
| Maximum Input Current ($I_O = I_{O,max}$) | $V_{IN,DC} = 36Vdc$ $I_O = I_{O,max}$ | $I_{IN,max}$ | - | - | 15 | A |
| No-load input current | 48Vin | | - | 0.10 | - | A |
| Standby Input current | Remote OFF | | - | 0.01 | 0.1 | A |
| Recommended Input Fuse | Fast blow external fuse recommended | | - | - | 30 | A |
| Input filter component values (C\L) | Internal values | | - | 9.4\0.33 | - | μF \ μH |
| Recommended External Input Capacitance | Low ESR capacitor recommended | C_{IN} | 220 | - | - | μF |
| Input Reflected Ripple Current | Through 12uH inductor | | - | 70 | - | mA |
| Operating Efficiency ² | $T_A = 25^\circ C$ $I_O = I_{O,max}$ $I_O = 50\% I_{O,max}$ | η | - | 94.5 | - | % |
| | | | - | 95.5 | - | % |

Note 1 - $T_A = 25^\circ C$, airflow rate = 400 LFM, $V_{in} = 48Vdc$, nominal V_{out} unless otherwise noted.

Note 2 - Refer to figure 9 and figure18

Output Specifications

Table 3. Output Specifications:

| Parameter | Notes & Condition ¹ | Symbol | Min | Typ | Max | Unit | |
|---|---|--------------------|---------------|------------|------------------|---------------------|----|
| Factory Set Voltage | $I_O=I_{O,max}$ | V_O | 11.88 | 12 | 12.12 | Vdc | |
| Output Voltage Line Regulation | All | V_O | - | 20 | 60 | mV | |
| Output Voltage Load Regulation | All | V_O | - | 20 | 60 | mV | |
| Output Voltage Temperature Regulation | All | V_O | - | 0.002 | 0.02 | %/°C | |
| Output Voltage Trim Range | All | V_O | -20 | | 10 | % | |
| Output Ripple, pk-pk | Measure with a 1uF ceramic capacitor in parallel with a 10uF tantalum capacitor, 0 to 20MHz bandwidth | V_O | - | 200 | 400 ² | mV _{PK-PK} | |
| Output Current | All | I_O | 0 | - | 42 | A | |
| Output DC current-limit inception ³ | All | I_O | 46.5 | - | 59 | A | |
| V_O Load Capacitance ⁴ | All | C_O | 470 | | 10000 | μF | |
| V_O Dynamic Response Peak Deviation Settling Time | 50% ~ 75% ~ 50% $I_{O,max}$, 0.1A/μs | $\pm V_O$ T_s | - - | 200 200 | - - | mV uS | |
| | 50% ~ 75% ~ 50% $I_{O,max}$, 1A/μs | $\pm V_O$ T_s | - - | 200 200 | - - | mV μS | |
| Turn-on transient | Rise time | $I_O=I_{O,max}$ | T_{rise} | - | 15 | 100 | mS |
| | Turn-on delay time | $I_O=I_{O,max}$ | $T_{turn-on}$ | - | 50 | 100 | mS |
| | Output voltage overshoot | $I_O = 0$ | % V_O | - | 0 | - | % |
| Isolation Voltage Input to outputs | 1mA for 60s Slew rate of 500V/1s | | 1500 | - | - | Vdc | |
| Switching frequency ⁵ | All | f_{sw} | - | 175 | - | KHz | |
| Remote ON/OFF control (positive logic) | Off-state voltage | All | -0.3 | - | 1.2 | Vdc | |
| | On-state voltage | All | 3.5 | - | 18 | Vdc | |

Note 1 - $T_a = 25^\circ\text{C}$, airflow rate = 400 LFM, $V_{in} = 48\text{Vdc}$, nominal V_{out} unless otherwise noted.

Note 2 - 400mV is for whole range including input voltage, load and temperature.

Note 3 - Hiccup: auto-restart when over-current condition is removed.

Note 4 - For ADQ500-48S12B-6LA, the capacitance range is 5000uF to 10000uF Electrolytic cap or similar type; for other modules, the capacitance range is 470uF to 10000uF Electrolytic cap or similar type.

Note 5 - For ADQ500-48S12B-6LA, Typical switch frequency is 140kHz.

Output Specifications

Table 3. Output Specifications, con't:

| Parameter | | Notes & Condition | Symbol | Min | Typ | Max | Unit |
|---|-------------------|---|----------------|------|-----|------|-------------------|
| Remote ON/OFF control (Negative logic) | Off-state voltage | All | | 3.5 | - | 18 | Vdc |
| | On-state voltage | All | | -0.3 | - | 1.2 | Vdc |
| Output over-voltage protection ⁶ | | All | V _O | 13.8 | - | 16 | Vdc |
| Pre-bias | | All | | 0 | - | 95 | % |
| Output over-temperature protection ⁷ | With baseplate | All | | - | 110 | - | °C |
| | Without baseplate | All | | - | 120 | - | °C |
| Over-temperature hysteresis | | All | | 10 | - | - | °C |
| + Sense | | All | V _O | - | - | +0.5 | Vdc |
| - Sense | | All | V _O | - | - | -0.5 | Vdc |
| MTBF | | Telcordia SR-332-2006; 80% load, 300LFM, 40 °C T _A | | - | 1.5 | - | 10 ⁶ h |

Note 6 - Hiccup: auto-restart when over-voltage condition is removed.

Note 7 - Auto recovery.

PMBus™ signal interface characteristics

Table 4. PMBus signal interface characteristics:

| Parameter | Condition1 | Symbol | Min | Typ | Max | Unit |
|---|-----------------------|--------|-----|-----|-----|------|
| Input High Voltage (CLK,DATA) | | | 2.1 | - | 3.6 | V |
| Input Low Voltage (CLK,DATA) | | | 0 | - | 0.4 | V |
| Input High Level Current (CLK,DATA) | | | -10 | - | 10 | uA |
| Output Low Voltage (CLK,DATA) | I _O =2mA | | - | - | 0.4 | V |
| Output high level open drain Leakage (CLK,DATA) | V _O = 3.3V | | - | 5 | - | uA |
| PMBUS operation frequency | | | | 100 | | KHz |

ADQ500-48S12-6L Performance Curves

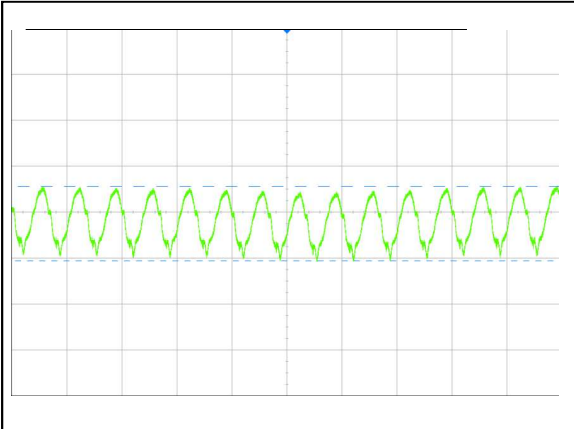


Figure 1: ADQ500-48S12-6L Input Reflected Ripple Current Waveform
 Vin = 48Vdc Load: Io = 42A
 Ch 1: Iin (5uS/div, 50mA/div)

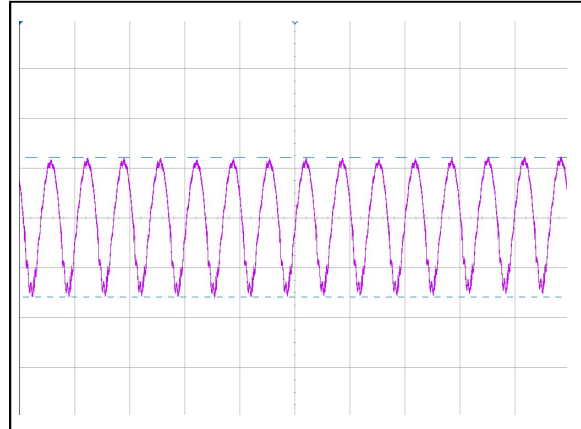


Figure 2: ADQ500-48S12-6L Ripple and Noise Measurement
 Vin = 48Vdc Load: Io = 42A
 Ch 1: Vo (5uS/div 20mV/div)

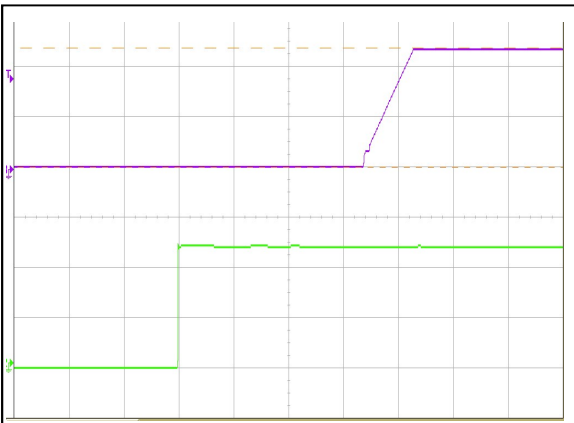


Figure 3: ADQ500-48S12-6L Output Voltage Startup Characteristic
 Vin = 48Vdc Load: Io = 42A (20mS/div)
 Ch 2: Vo (5V/div) Ch 3: Vin (20V/div)

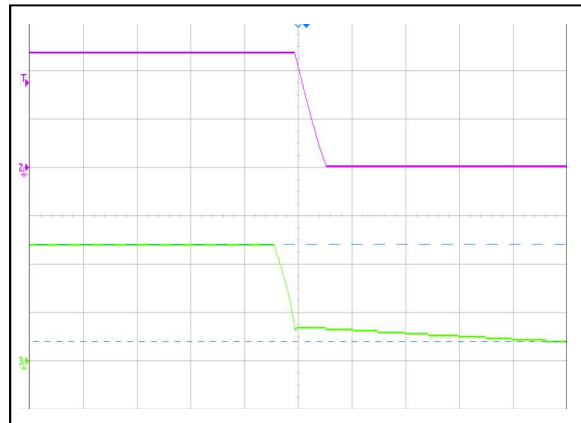


Figure 4: ADQ500-48S12-6L Turn Off Characteristic (2mS/div)
 Vin = 48Vdc Load: Io = 42A
 Ch 2: Vo (5V/div) Ch 3: Vin (20V/div)

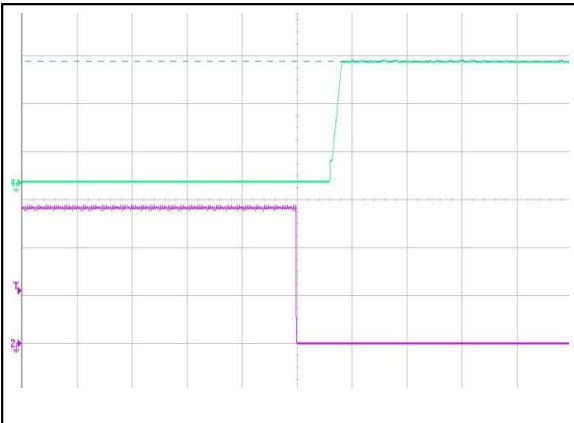


Figure 5: ADQ500-48S12-6L Remote ON Waveform (50mS/div)
 Vin = 48Vdc Load: Io = 42A
 Ch 2: Vo (5V/div) Ch 4: Remote ON (2V/div)

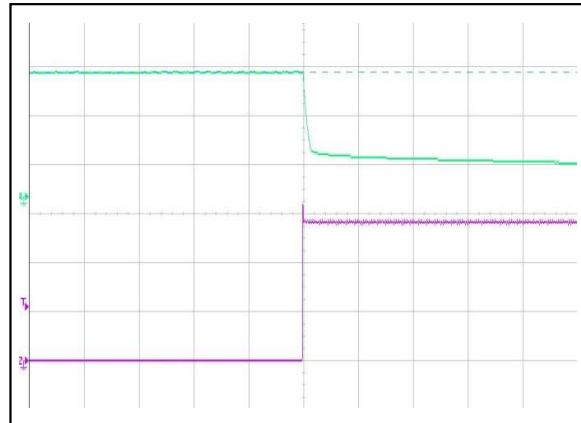


Figure 6: ADQ500-48S12-6L Remote OFF Waveform (20mS/div)
 Vin = 48Vdc Load: Io = 42A
 Ch 2: Vo (5V/div) CH4: Remote OFF (2V/div)

ADQ500-48S12-6L Performance Curves

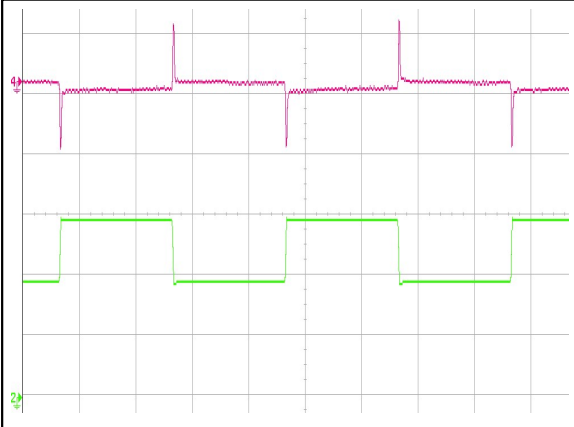


Figure 7: ADQ500-48S12-6L Transient Response (2mS/div)
50%-75%~50% load change, 0.1A/uS slew rate, Vin = 48Vdc
Ch 2: Io (10A/div) Ch 4: Vo (200mV/div)

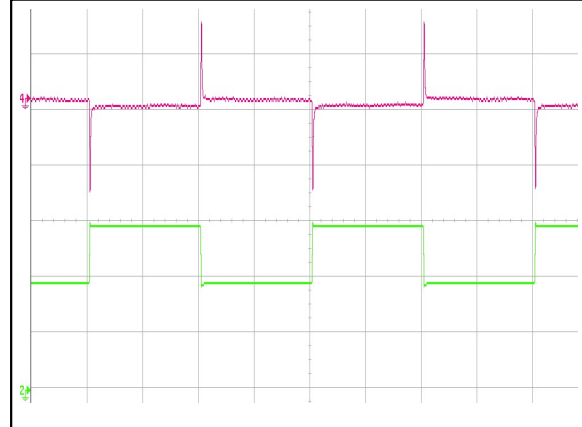


Figure 8: ADQ500-48S12-6L Transient Response (2mS/div)
50%-75%~50% load change, 1A/uS slew rate, Vin = 48Vdc
Ch 2: Io (10A/div) Ch 4: Vo (200mV/div)

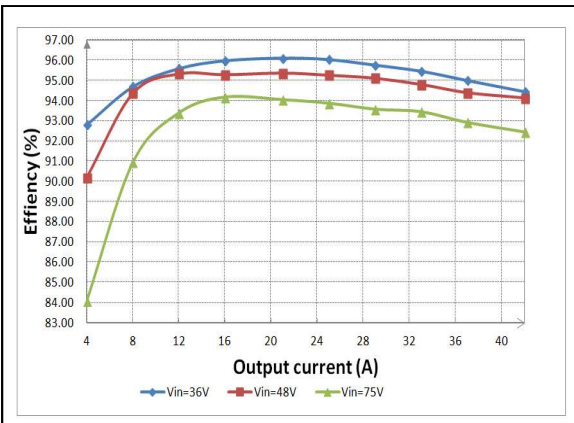


Figure 9: ADQ500-48S12-6L Efficiency Curves @ 25 degC

Loading: Io = 10% increment to 42A

ADQ500-48S12B-6L Performance Curves

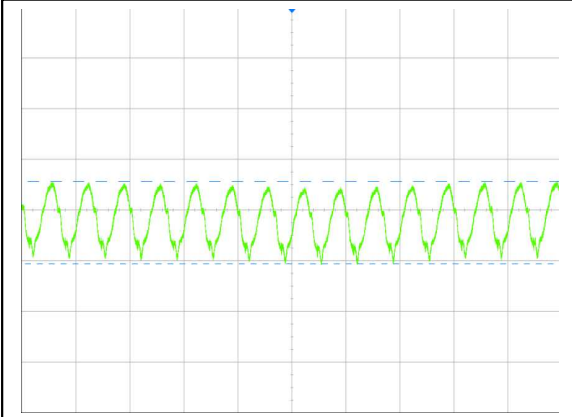


Figure 10: ADQ500-48S12B-6L Input Reflected Ripple Current Waveform
 $V_{in} = 48Vdc$ Load: $I_o = 42A$
 Ch 1: I_{in} (5 μ S/div, 50mA/div)

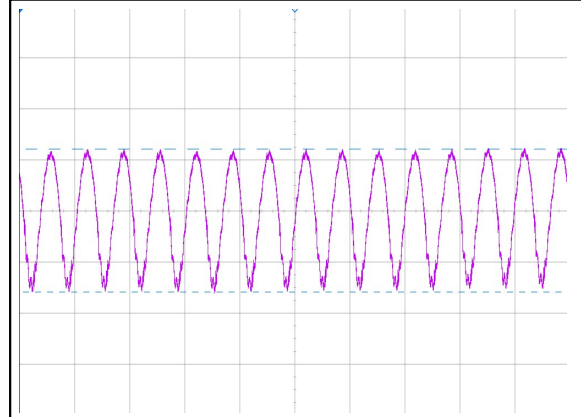


Figure 11: ADQ500-48S12B-6L Ripple and Noise Measurement
 $V_{in} = 48Vdc$ Load: $I_o = 42A$
 Ch 1: V_o (5 μ S/div, 20mV/div)

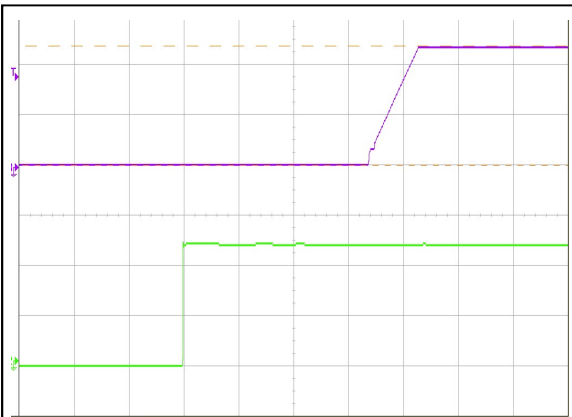


Figure 12: ADQ500-48S12B-6L Output Voltage Startup Characteristic
 $V_{in} = 48Vdc$ Load: $I_o = 42A$ (20mS/div)
 Ch 2: V_o (5V/div) Ch 3: V_{in} (20V/div)

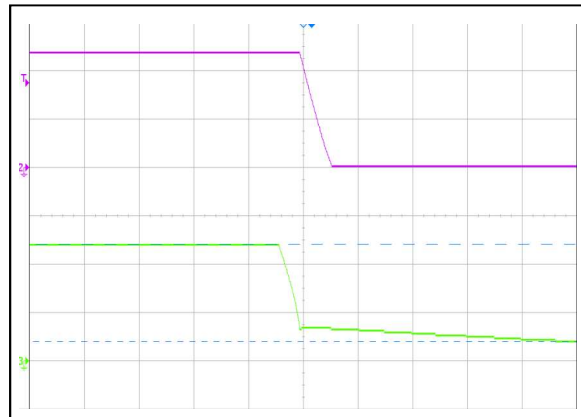


Figure 13: ADQ500-48S12B-6L Turn Off Characteristic (2mS/div)
 $V_{in} = 48Vdc$ Load: $I_o = 42A$
 Ch 2: V_o (5V/div) Ch 3: V_{in} (20V/div)

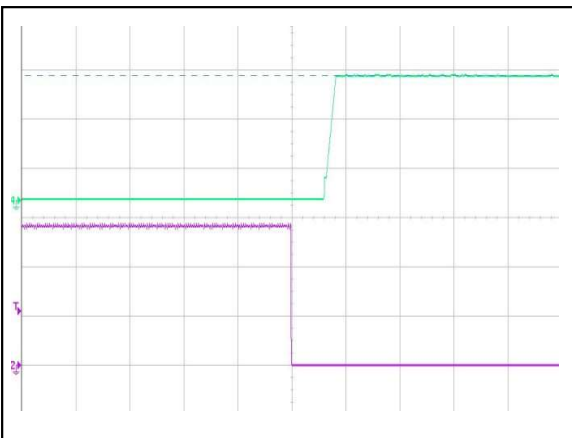


Figure 14: ADQ500-48S12B-6L Remote ON Waveform (50mS/div)
 $V_{in} = 48Vdc$ Load: $I_o = 42A$
 Ch 2: V_o (5V/div) Ch 4: Remote ON (2V/div)

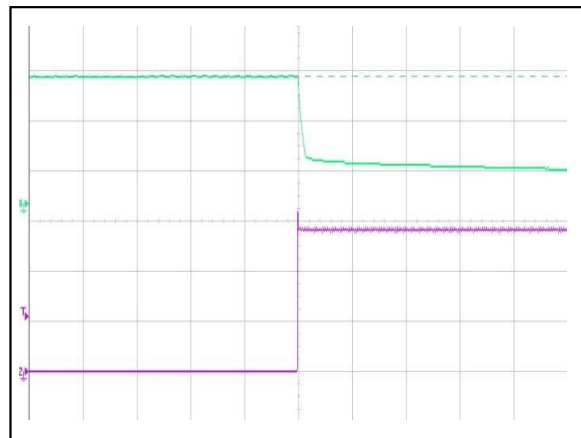


Figure 15: ADQ500-48S12B-6L Remote OFF Waveform (20mS/div)
 $V_{in} = 48Vdc$ Load: $I_o = 42A$
 Ch 2: V_o (5V/div) CH4: Remote OFF (2V/div)

ADQ500-48S12B-6L Performance Curves

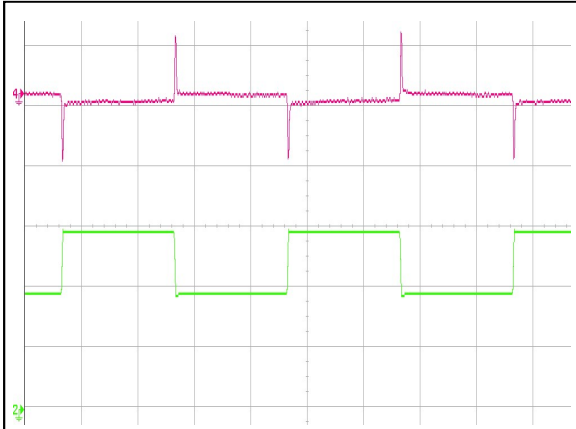


Figure 16: ADQ500-48S12B-6L Transient Response (2mS/div)
50%-75%~50% load change, 0.1A/uS slew rate, Vin = 48Vdc
Ch 2: Io (10A/div) Ch 4: Vo (200mV/div)

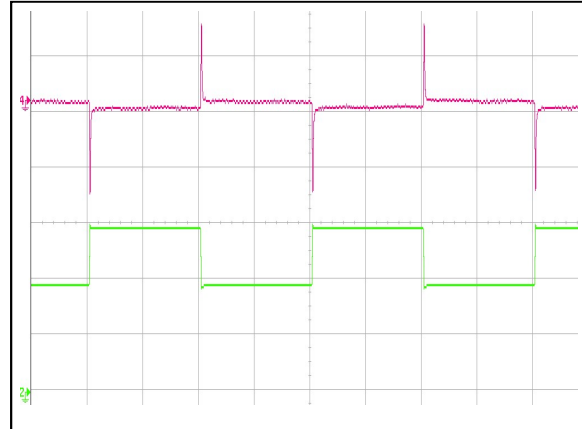


Figure 17: ADQ500-48S12B-6L Transient Response (2mS/div)
50%-75%~50% load change, 1A/uS slew rate, Vin = 48Vdc
Ch 2: Io (10A/div) Ch 4: Vo (200mV/div)

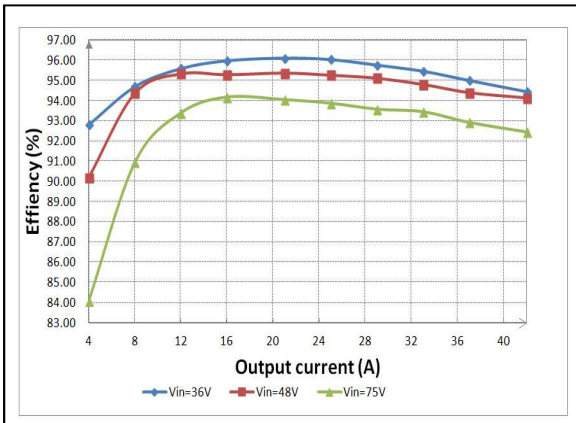



Figure 18: ADQ500-48S12B-6L Efficiency Curves @ 25 degC

Loading: Io = 10% increment to 42A

Mechanical Specifications

Mechanical Outlines – Open-frame Module

ADQ500-48S12-6L

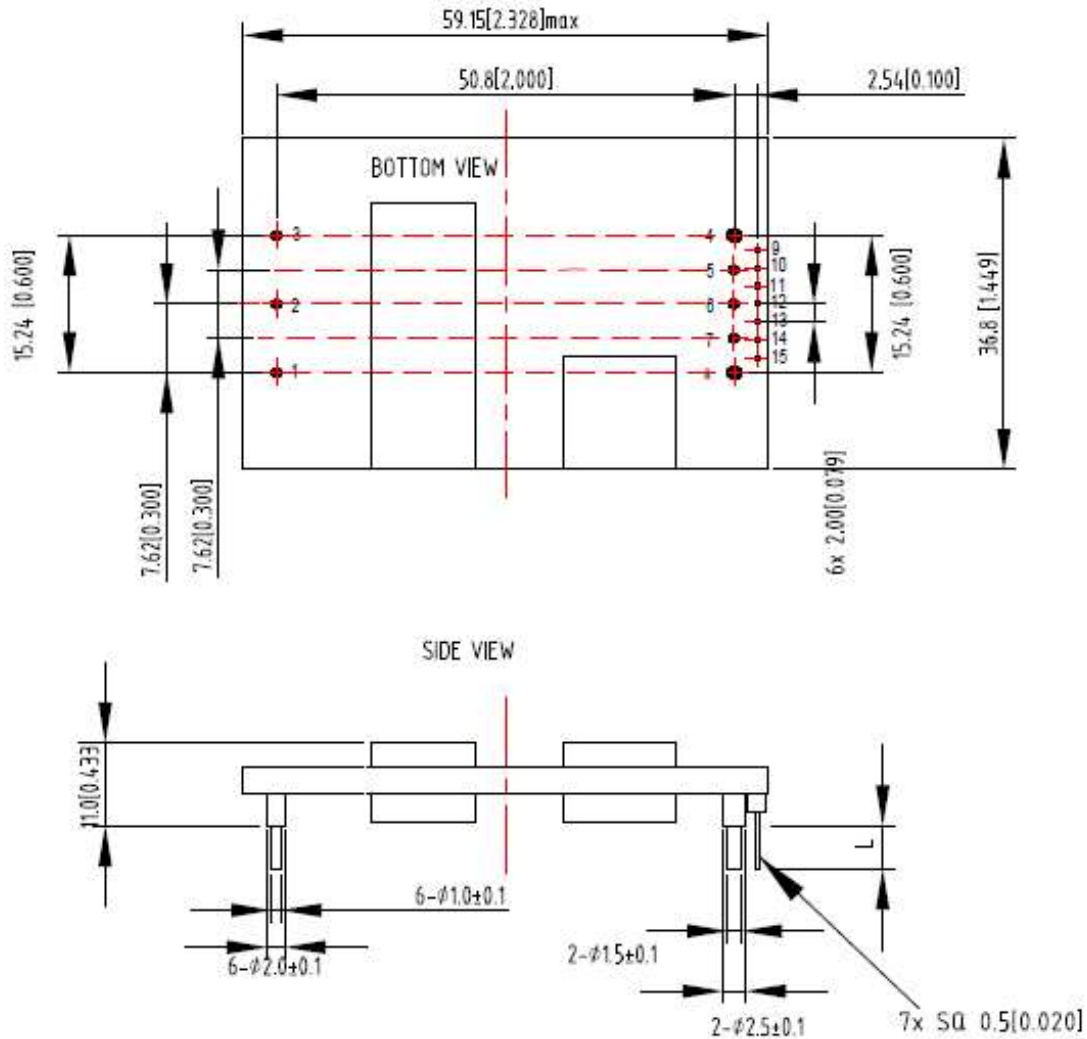


UNIT: mm[inch]

TOLERANCE: X.X mm ± 0.5 mm [X.XX in. ± 0.02 in.]

X.XX mm ± 0.25 mm [X.XXX in. ± 0.01 in.]

Mechanical Outlines – Baseplate Module

ADQ500-48S12B-6L

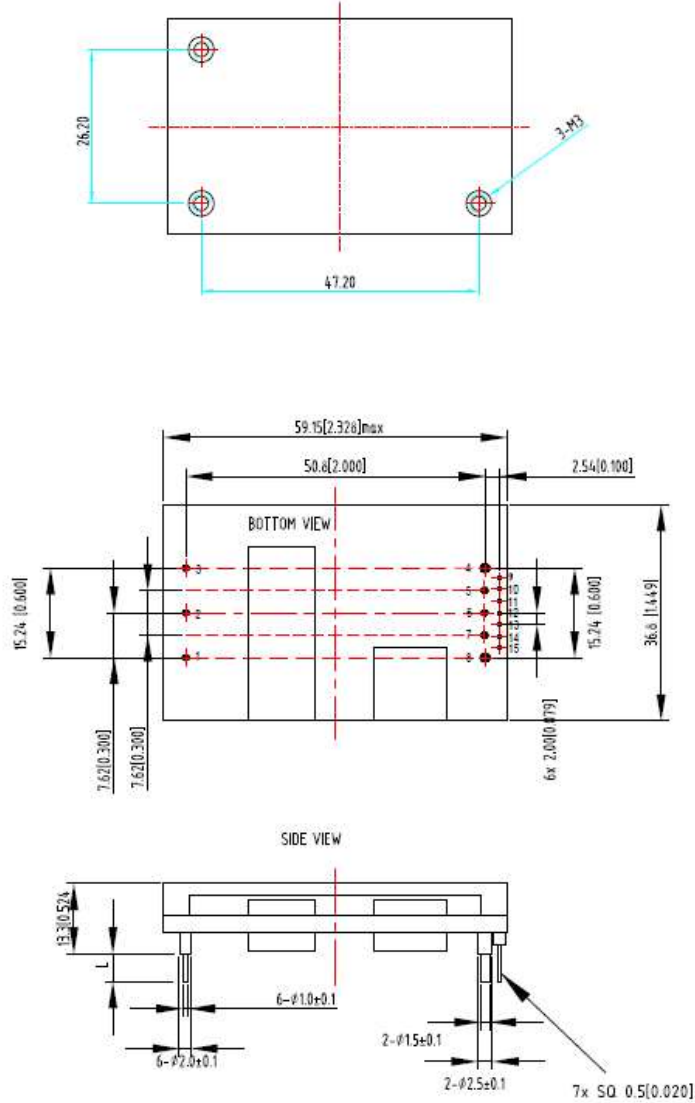

UNIT: mm[inch]

TOLERANCE: X.X mm \pm 0.5 mm [X.XX in. \pm 0.02 in.]

X.XX mm \pm 0.25 mm [X.XXX in. \pm 0.01 in.]

Pin length option

Table 5. Pin length option

| Device code suffix | L |
|--------------------|---------------------|
| -4 | 4.8mm \pm 0.25 mm |
| -6 | 3.8mm \pm 0.25 mm |
| -8 | 2.8mm \pm 0.25 mm |
| None | 5.8mm \pm 0.25 mm |

Pin Designations

| Pin NO. | Name | Function |
|---------|---------------|-------------------------|
| 1 | V_{in+} | Positive input voltage |
| 2 | Remote ON/OFF | Remote control |
| 3 | V_{in-} | Negative input voltage |
| 4 | V_{o-} | Negative output voltage |
| 5 | -Sense | Remote sense negative |
| 6 | trim | Voltage adjustment |
| 7 | +Sense | Remote sense positive |
| 8 | V_{o+} | Positive output voltage |
| 9 | C2 | Digital |
| 10 | Sig_Gnd | |
| 11 | Data | |
| 12 | SMBAlert | |
| 13 | Clock | |
| 14 | Addr1 | |
| 15 | Addr0 | |

Environmental Specifications

EMC Immunity

ADQ500-48S12 power supply is designed to meet the following EMC immunity specifications:

Table 6. Environmental Specifications:

| Document | Description | Criteria |
|---------------------------|---|----------|
| EN55022, Class B Limits | Conducted and Radiated EMI Limits | B |
| IEC/EN 61000-4-2, Level 3 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques - Electrostatic discharge immunity test. Enclosure Port | B |
| IEC/EN 61000-4-6, Level 2 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Continuous Conducted Interference. DC input port | A |
| IEC/EN 61000-4-4, Level3 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Electrical Fast Transient. DC input port. | B |
| IEC/EN 61000-4-5 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Immunity to surges - 600V common mode and 600V differential mode for DC ports | B |
| EN61000-4-29 | Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Voltage Dips and short interruptions and voltage variations. DC input port | B |

Criterion A: Normal performance during and after test.

Criterion B: For EFT and surges, low-voltage protection or reset is not allowed. Temporary output voltage fluctuation ceases after disturbances ceases, and from which the EUT recovers its normal performance automatically. For Dips and ESD, output voltage fluctuation or reset is allowed during the test, but recovers to its normal performance automatically after the disturbance ceases.

Recommend EMC Filter Configuration

See Figure 30

Safety Certifications

The ADQ500-48S12 power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 7. Safety Certifications for ADQ500-48S12- series power supply system

| Document | File # | Description |
|--------------|---------------------|----------------------------|
| UL/CSA 62368 | E132002-A384-UL | US and Canada Requirements |
| EN62368 | | European Requirements |
| IEC62368 | | International Requirements |
| CE | C8031 | CE Marking |
| TUV | B 15 07 13890 02251 | Germany Requirements |
| UL94,V-0 | | flammability rating |

Operating Temperature

The ADQ500 series power supplies will start and operate within stated specifications at an ambient temperature from -40 °C to 85 °C under all load conditions. The storage temperature is -55 °C to 125 °C.

Thermal Considerations – Open-frame module

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling of the DC/DC converter can be verified by measuring the temperature at the test point as shown in the Figure 19. The temperature at this point should not exceed the max values in the table 7.

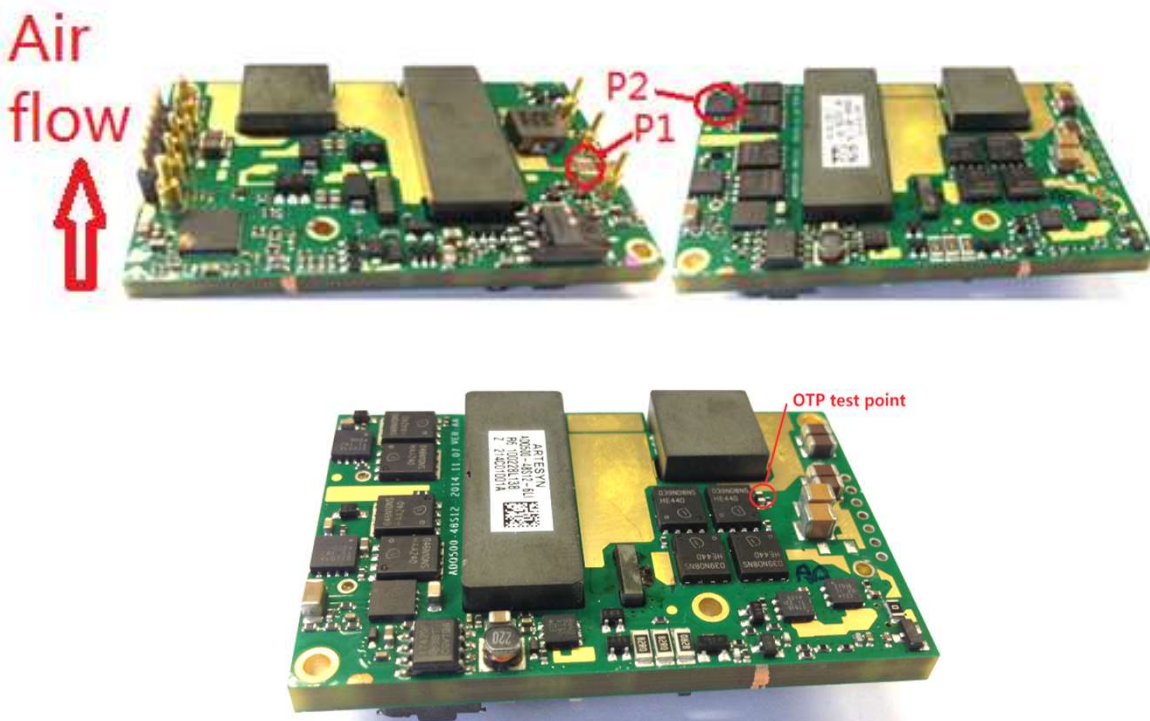


Figure 19 Temperature test point

Table 8. Temperature limit of the test point

| Test Point | Temperature Limit |
|------------|-------------------|
| P1 | 115 °C |
| P2 | 120 °C |

For a typical application, figure 20 shows the derating of output current vs. ambient air temperature at different air velocity@48V input. Figure 21 shows the thermal image taken by a RF camera at a rated I/O condition.

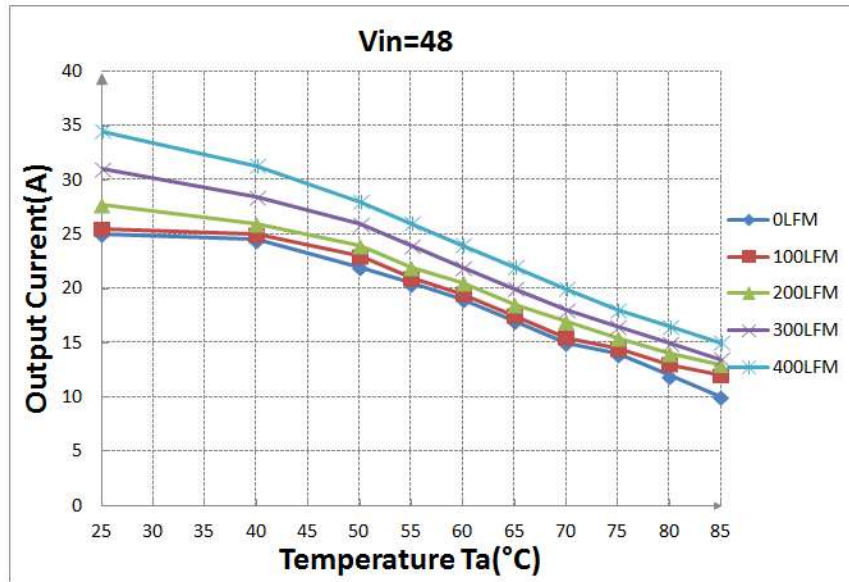


Figure 20 Output power derating, 48V_{IN}, air flowing across the converter from V_{IN} -to V_{IN}+

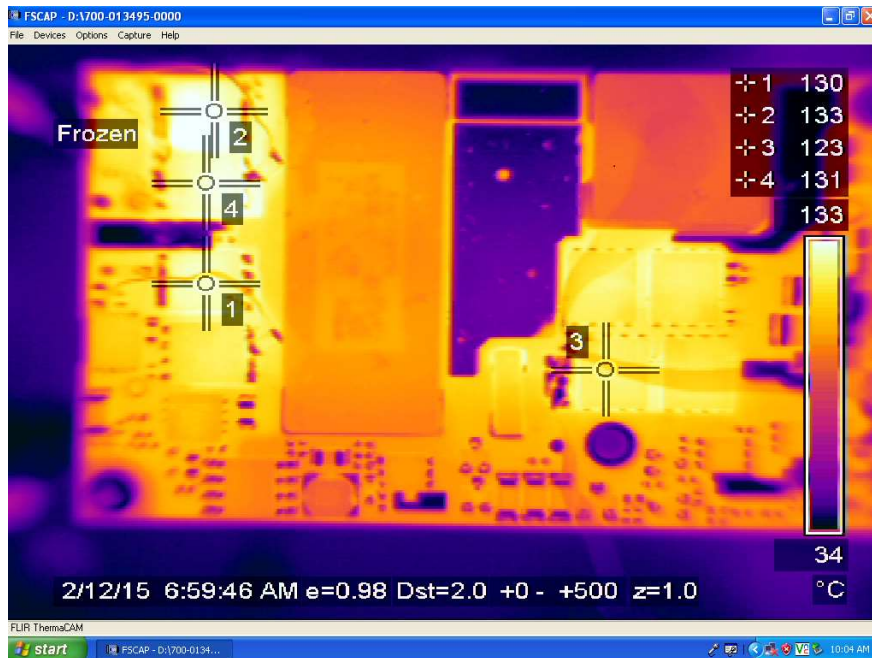


Figure 21 Thermal image, 48V_{IN}, 12V_O full load, room temperature

Thermal Considerations –Base plate module

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling can be verified by measuring the temperature at the test points as shown in figure 22. The temperature at this point should not exceed the max values in the table 8.

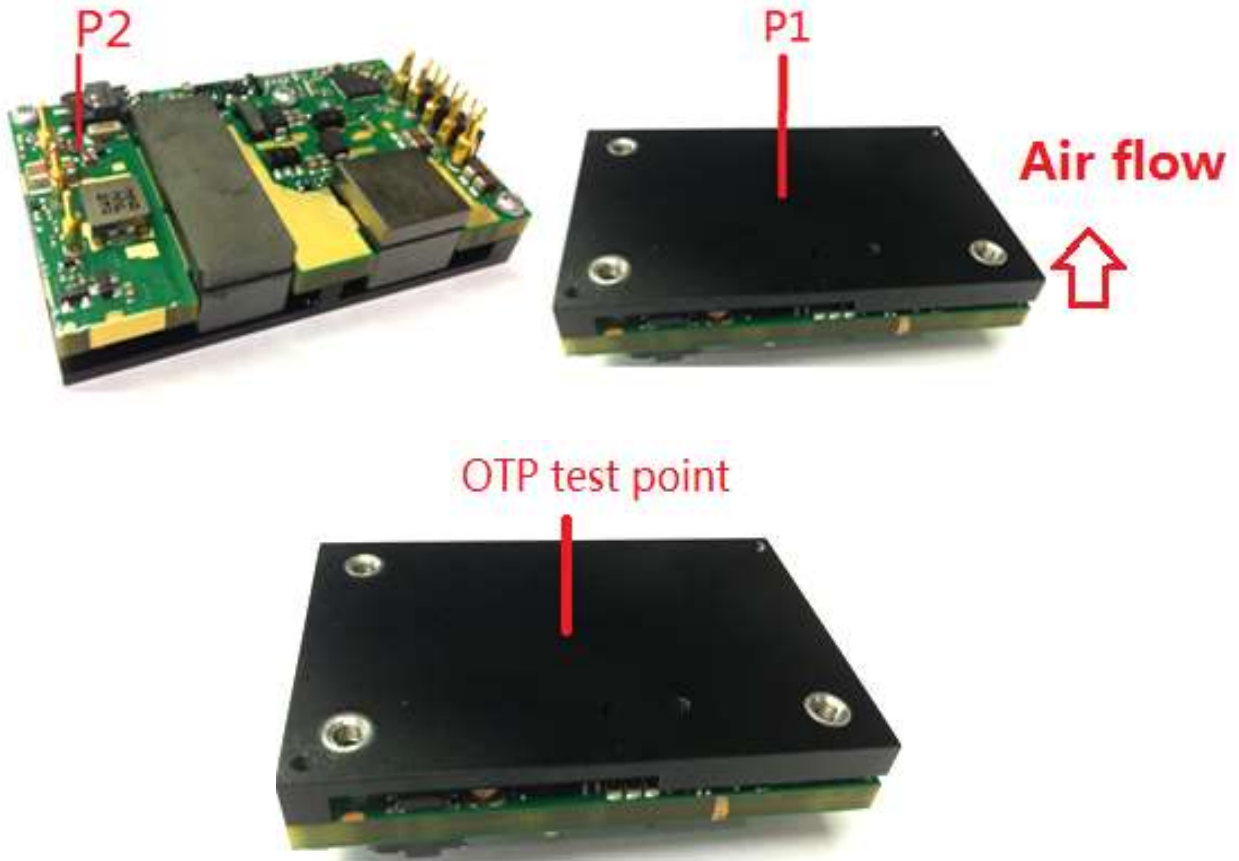


Figure 22 Temperature test points

Table 9. Temperature limit of the test point

| Test Point | Temperature Limit |
|------------|-------------------|
| P1 | 110 °C |
| P2 | 115 °C |

The typical test condition is shown in Figure 23.

For a typical application, figure 24 shows the derating of output current vs. ambient air temperature at different air velocity @48V input.

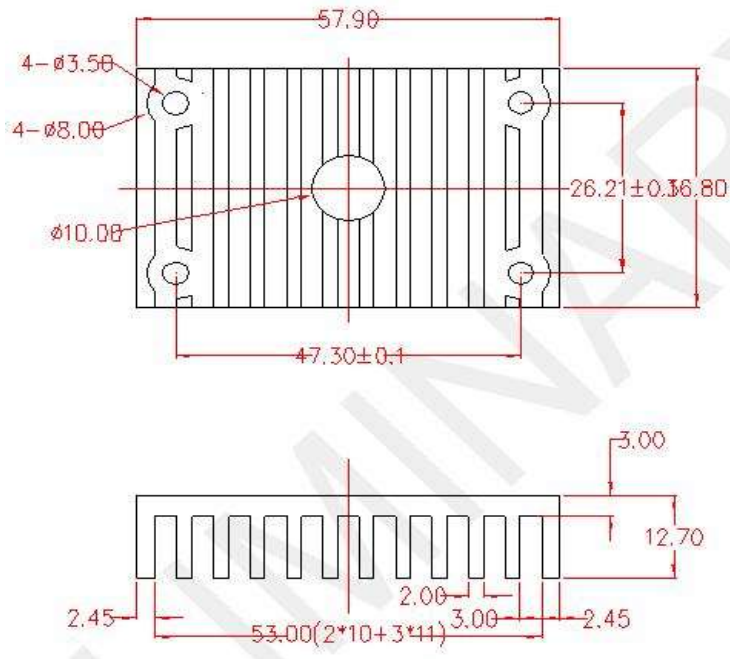


Figure 23 Typical test condition, heatsink

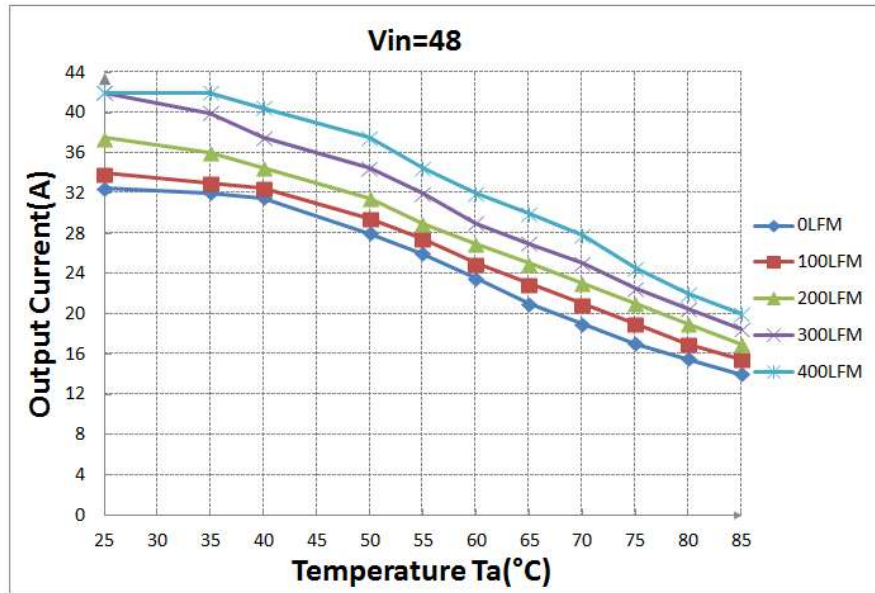


Figure 24 Output power derating, 48V_{IN}, air flowing across the converter from V_{IN} - to V_{IN} +

Qualification Testing

Table 10. Qualification testing

| Parameter | Unit (pcs) | Test condition |
|------------------|------------|--|
| Halt test | 4 ~ 5 | Ta,min-10°C to Ta,max+30°C, 5°C step, Vin = min to max, 0 ~ 100% load |
| Vibration | 3 | Frequency range: 5Hz ~ 20Hz, 20Hz ~ 200Hz, A.S.D: 1.0m ² /s ³ , -3db/oct, axes of vibration: X/Y/Z, Time: 30min/axes |
| Mechanical shock | 3 | 30g, 6ms, 3axes, 6directions, 3times/direction |
| Thermal shock | 3 | -55°C to 125°C, unit temperature 20cycles |
| Thermal cycling | 3 | -40°C to 85°C, temperature change rate: 1° C/min, cycles: 2cycles |
| Humidity | 3 | 40°C, 95%RH, 48h |
| Solder ability | 15 | IPC J-STD-002C-2007 |

Application Notes

Typical Application

Below is the typical application of the ADQ500-48S12 series power supply.

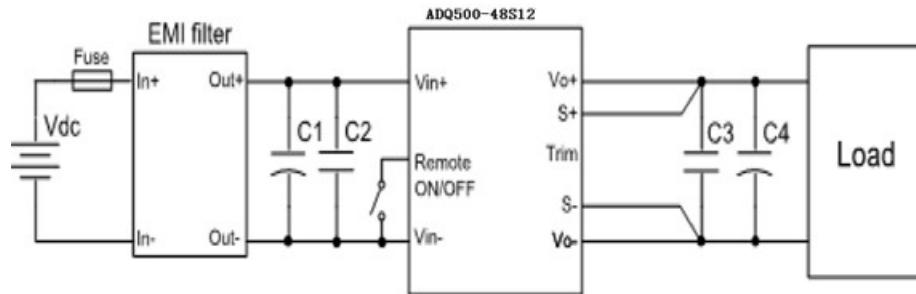


Figure 25 Typical application

- C1: 220 μ F/100V electrolytic capacitor, P/N: UPM2A221MPD (Nichicon) or equivalent caps
- C2, C3: 1 μ F/100V X7R ceramic capacitor, P/N: C3225X7R2A105KT0L0U (TDK) or equivalent caps
- C4: 470 μ F/25V electrolytic capacitor, P/N: UPM1E471MED (Nichicon) or equivalent caps

Note: If ambient temperature is below -5°C , double output capacitor (Low ESR, $\text{ESR} \leq 100\text{m}\Omega$) is needed for output.

Fuse: External fast blow fuse with a rating of 30A/250Vac. The recommended fuse model is **0314030 MRP** from Karwin Tech limited..

EMI filter: Refer to figure 30

Remote ON/OFF

Either positive or negative remote ON/OFF logic is available in ADQ500-48S12. The logic is CMOS and TTL compatible. Below is the detailed internal circuit and reference in ADQ500-48S12.

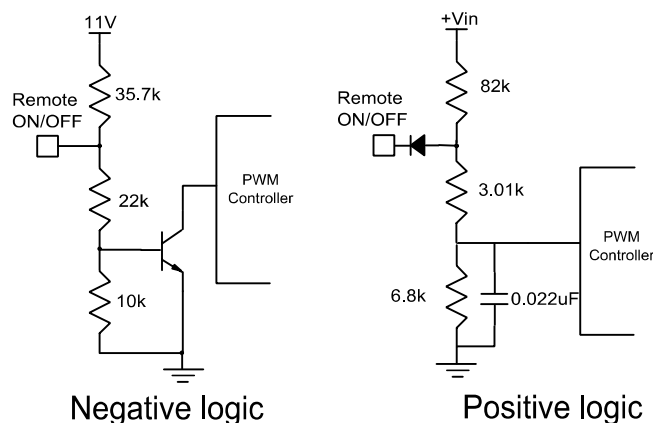


Figure 26 Remote ON/OFF internal diagram

Remote sense

If the load is far from the unit, connect S+ and S- to the terminal of the load respectively to compensate the voltage drop on the transmission line. See Figure 25. If the sense compensate function is not necessary, connect S+ to Vo+ and S- to Vo- directly.

Trim Characteristics

To increase or decrease the output voltage set point, connect an external resistor between the TRIM pin and either the Vo+ or Vo-. The TRIM pin should be left open if this feature is not used. Below Trim equation is only adapt to the module without droop current sharing option code; For the module with droop current sharing option code, please contact Artesyn's technical support team. Connecting an external resistor between Trim pin and Vo- pin will decrease the output voltage. While connection it between Trim and Vo+ will increase the output voltage. The following equations determine the external resistance to obtain the trimmed output voltage.

$$R_{adj-down} = \frac{511}{\Delta} - 10.22(K\Omega)$$

$$R_{adj-up} = \frac{5.11 \times V_{nom} \times (100 + \Delta)}{1.225 \times \Delta} - \frac{511}{\Delta} - 10.22(K\Omega)$$

Δ :Output e rate against nominal output voltage.

$$\Delta = \frac{100 \times (V_{nom} - V_0)}{V_{nom}}$$

V_{norm} :Nominal output voltage.

For example, to get 13.2V output, the trimming resistor is

$$\Delta = \frac{100 \times (V_{nom} - V_0)}{V_{nom}} = \frac{100 \times (13.2 - 12)}{12} = 10$$

The output voltage can also be trimmed by potential applied at the Trim pin.

$$R_{adj-up} = \frac{5.11 \times 12 \times (100 + 10)}{1.225 \times 10} - \frac{511}{10} - 10.22 = 489.3(K\Omega)$$

$$V_O = (V_{trim} + 1.225) \times 1.347$$

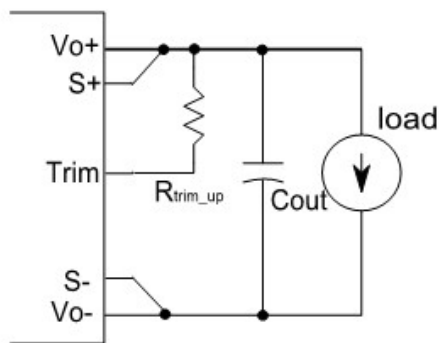


Figure 27 Trim up

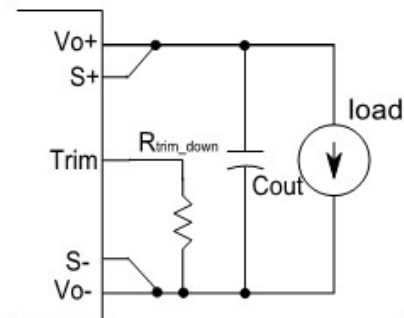


Figure 28 Trim down

Where is the potential applied at the Trim pin, and Vo is the desired output voltage. When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power.

Input Ripple & Inrush Current And Output Ripple & Noise Test Configuration

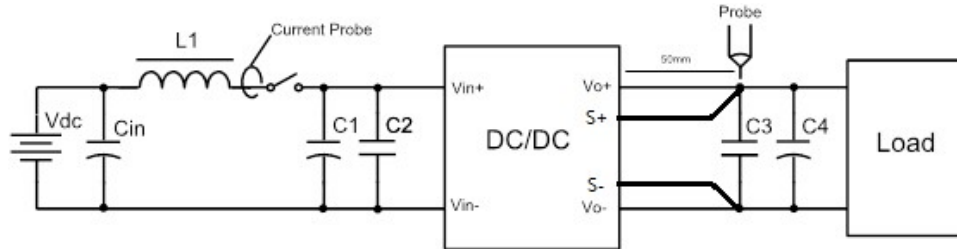


Figure 29 Input ripple & inrush current, ripple & noise test configuration

Vdc: DC power supply

L1: 12 μ H

Cin: 220 μ F/100V typical

C1 ~ C4: See Figure 25

Note: Using a coaxial cable with series 50 Ω resistor and 0.68 μ F ceramic capacitor or a ground ring of probe to test output ripple & noise is recommended.

EMC test conditions

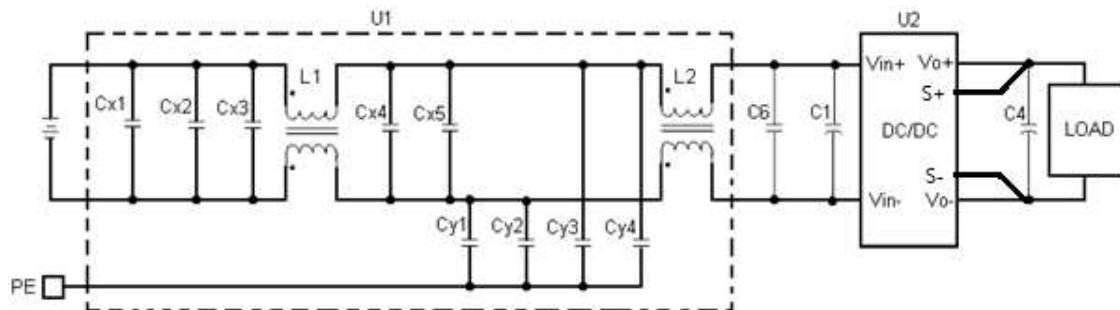


Figure 30 EMC test configuration

U1: Input EMC filter

U2: Module to test, ADQ500-48S12

Cx1, Cx2, Cx4: 1000nF/100V/X7R capacitor

Cx3, Cx5: 2200nF/100V/X7S capacitor

Cy1, Cy2, Cy3, Cy4: 1.0 μ F/630V/X7T, Y capacitor

L1, L2: 473 μ H, common mode inductor

C6: 100nF/100V/X7R capacitor

C1: 220 μ F/100V electrolytic capacitor

C4: 470 μ F/25V electrolytic capacitor

PMBus Communication

The module has a digital PMBus interface to allow the module to be monitored, controlled and configured by the system. The module supports 3 PMBus signal lines, Data, Clock, Control (C2 pin, optional), and 2 Address line Addr0 and Addr1. More detail PMBus information can be found in the PMBus Power Management Protocol Specification, Part I and part II, revision 1.2; which is shown in <http://pmbus.org>. 100kHz bus speeds is supported by the module.

The module supports the Packet Error Checking (PEC) protocol. It can check the PEC byte provided by the PMBus master, and include a PEC byte in all message responses to the master.

The module contains a data flash used to store configuration settings, which will not be programmed into the device data flash automatically. The STORE_DEFAULT_ALL command must be used to commit the current settings are transfer from RAM to data flash as device defaults.


PMBus Addressing

The module has fixed PMBUS address (0x59). Through this address, the host computer can address the module.

PMBus Data Format

The module receives and report date in LINEAR format. The Exponent of the data words is fixed at a reasonable value for the command; altering the exponent is not supported. DIRECT format is not supported by the module.

For commands that set or report any voltage thresholds related to the output voltage, the module supports the linear data format consisting of a two byte value with a 16-bit, unsigned mantissa, and a fixed exponent of -9 . The format of the two data bytes is shown below:

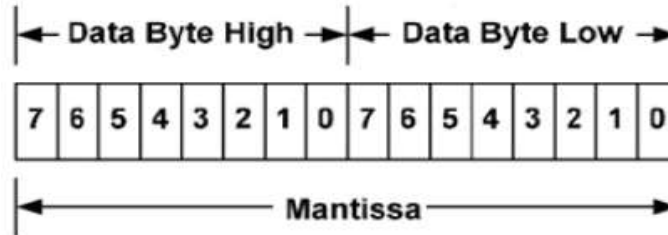


The equation can be written as:

$$V_{out} = \text{Mantissa} \times 2^{-9}$$

For example, considering set V_{out} to 12V by `VOUT_COMMAND`, the read/write data can be calculated refer to below process:

1. Mantissa = $V_{out}/2^{-9} = 12/2^{-9} = 6144$;
2. Converter the calculated Mantissa to hexadecimal 0x1800.

For commands that set or report all other thresholds, including input voltages, output current, temperature, time and frequency, the supported linear data format is a two byte value with: an 11 bit, two's complement mantissa, and a 5 bit, two's complement exponent (scaling factor). The format of the two data bytes is shown as in below.

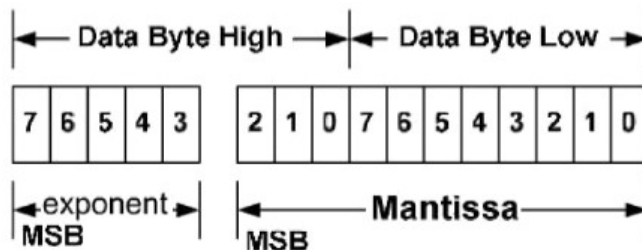

The equation can be written as:

$$\text{Value} = \text{Mantissa} \times 2^{\text{exponent}}$$

For example, considering set the turn on threshold of input under voltage lockout to 33V by `VIN_ON` command; the read/write data can be calculated refer to below process:

1. Get the exponent of V_{in} , 0; whose binary is 00000
2. Mantissa = $V_{in}/=33/=33$;
3. Converter the calculated Mantissa to hexadecimal 21, then converter to binary 00000100001;
4. Combine the exponent and the mantissa, 00000 and 0000000000100001;
5. Converter binary 0000000000100001 to hexadecimal 0021.

The detail exponent and resolution of main parameter is to be decided later.

Supported PMBus Command

The main PMBus commands described in the PMBus 1.2 specification are supported by the module. Partial PMBus commands are fully supported; Partial PMBus commands have difference with the definition in PMBus 1.2 specification. The details about all the supported PMBus commands are to be decided later.

.ADQ500-48S12 Series Supported PMBus™ Command List:

| Command Code | Command Name | Default Value | Access Type | Data Bytes | Data Format | Description |
|--------------|------------------------|---------------|-------------|------------|-------------|--|
| 0x01 | OPERATION | 0x80 | R/W | 1 | Bit field | Turn the module on or off by PMBUS command. |
| 0x03 | CLEAR_FAULTS | / | Send | 1 | / | Clear any fault bits that have been set. |
| 0x11 | STORE_DEFAULT_ALL | / | Send | 1 | / | Stores operating parameters from RAM to data flash. This command is effective to the parameter of all command in the table. |
| 0x12 | RESTORE_DEFAULT_ALL | / | Send | 1 | / | Restores operating parameters from data flash to RAM. This command can't be issued when the power unit is running. |
| 0x20 | VOUT_MODE | 0x17 | Read | 1 | mode+exp | To read Vo data format. |
| 0x21 | VOUT_COMMAND | 12.0Vdc | R/W | 2 | Vout Linear | Set the output voltage. Range: 9.6~13.2Vdc Exponent: -9 |
| 0x33 | FREQUENCY_SWITCH | 175KHz | R/W | 2 | Linear | Set the switching frequency. Range: 150~180KHz |
| 0x35 | VIN_ON | 34Vdc | R/W | 2 | Linear | Set the turn on voltage threshold of Vin under voltage lockout. VIN_ON should be higher than VIN_OFF, and keep 2V hysteresis. Range: 32~46Vdc |
| 0x36 | VIN_OFF | 32Vdc | R/W | 2 | Linear | Set the turn off voltage threshold of Vin under voltage lockout. VIN_ON should be higher than VIN_OFF, and keep 2V hysteresis. Range: 31~46Vdc |
| 0x40 | VOUT_OV_FAULT_LIMIT | 15Vdc | R/W | 2 | Vout Linear | Set the output overvoltage fault threshold. Must be higher than the value of VOUT_COMMAND and VOUT_OV_WARN_LIMIT; Range:11-16Vdc Exponent:-9 |
| 0x41 | VOUT_OV_FAULT_RESPONSE | 0xB8 | Read | 1 | Bit field | Instructs what action to take in response to an output overvoltage fault. |
| 0x42 | VOUT_OV_WARN_LIMIT | 15Vdc | R/W | 2 | Vout Linear | Set a threshold causing an output voltage high warning. Must be less than VOUT_OV_FAULT_LIMIT value. Range:11~16Vdc Exponent:-9 |

ADQ500-48S12 Series Supported PMBus™ Command List:

| Command Code | Command Name | Default Value | Access Type | Data Bytes | Data Format | Description |
|--------------|------------------------|---------------|-------------|------------|-------------|---|
| 0x46 | IOUT_OC_FAULT_LIMIT | 50A | R/W | 2 | Linear | Set the output overcurrent fault threshold. Must be greater than IOUT_OC_WARN_LIMIT value Range:20~60A |
| 0x47 | IOUT_OC_FAULT_RESPONSE | 0xF8 | Read | 1 | Bit field | Instructs what action to take in response to an output overcurrent fault. |
| 0x4A | IOUT_OC_WARN_LIMIT | 46A | R/W | 2 | Linear | Set a threshold causing an output current high warning. Must be less than IOUT_OC_FAULT_LIMIT value. Range:10~45A |
| 0x4F | OT_FAULT_LIMIT | 120Deg.C | R/W | 2 | Linear | Set the over temperature fault threshold. Range:25~140Deg.C |
| 0x55 | VIN_OV_FAULT_LIMIT | 110Vdc | R/W | 2 | Linear | Set the input overvoltage fault threshold. Range:48~110Vdc |
| 0x5E | POWER_GOOD_ON | 11Vdc | R/W | 2 | Vout Linear | Sets the output voltage at which the bit 3 of STATUS_WORD high byte should be asserted. Must be greater than POWER_GOOD_OFF value by 1.6V. Range:8.1 ~13.2Vdc Exponent:-9 |
| 0x5F | POWER_GOOD_OFF | 9Vdc | R/W | 2 | Vout Linear | Sets the output voltage at which the bit 3 of STATUS_WORD high byte should be negated. Must be less than POWER_GOOD_ON value by 1.6V. Range:8.1 ~13.2Vdc Exponent:-9 |
| 0x79 | STATUS_WORD | / | Read | 2 | Bit field | Returns the information with a summar of the module's fault/warning. |
| 0x88 | READ_VIN | / | Read | 2 | Linear | Returns the input voltage of the module. |
| 0x8B | READ_VOUT | / | Read | 2 | Vout Linear | Returns the output voltage of the module. |
| 0x8C | READ_IOUT T | / | Read | 2 | Linear | Returns the output current of the module. |
| 0x8E | READ_TEMPERATURE_1 | / | Read | 2 | Linear | Returns the module's hot spot temperature of the module. |
| 0x98 | PMBUS_REVISION | 1.2 | Read | 1 | Bit field | Reads the revision of the PMBus. |
| 0xE0 | MFR_C2_Configure | 0x00 | R/W | 1 | Bit field | Configures the C2 pin (secondary on/off pin) function and logic; |
| 0xE1 | MFR_PGOOD_POLARITY | 0x00 | R/W | 1 | Bit field | Configure Power Good logic. |
| 0xF7 | MFR_C1_C2_ARA_CONFIG | 0x00 | R/W | 1 | Bit field | Configure C2 pin function. |

OPERATION [0x01]

| Bit number | Purpose | Bit Value | Meaning | Default Settings: 0x80 |
|------------|---------------------------|-----------|---------------------------|------------------------|
| 7: | Enable/Disable the module | 1 | Output is enabled | 1 |
| | | 0 | Output is disabled | |
| 6: | Reserved | | | 0 |
| 5:4 | Margins | 00 | No margin | 00 |
| | | 01 | Margin low(Act on Fault) | |
| | | 10 | Margin high(Act on Fault) | |
| 3:0 | Reserved | | | 0000 |

VOUT_OV_FAULT_RESPONSE [0x41]

| Bit number | Purpose | Bit Value | Meaning | Default Settings:0xB8 |
|------------|--------------------|-----------|---|-----------------------|
| 7: 6 | Response settings | 10 | Unit shuts down and responds according to the retry settings | 10 |
| 5:3 | Retry setting | 111 | Unit continuously restarts while fault is present until commanded off | 111 |
| | | 000 | Unit does not attempt to restart on fault | |
| 2:0 | Delay time setting | 000 | No delay supported | 000 |

IOUT_OC_FAULT_RESPONSE [0x47]

| Bit number | Purpose | Bit Value | Meaning | Default Setting:0xF8 |
|------------|--------------------|-----------|---|----------------------|
| 7: 6 | Response settings | 11 | Unit shuts down and responds according to the retry settings | 11 |
| 5:3 | Retry setting | 111 | Unit continuously restarts while fault is present until commanded off | 111 |
| | | 000 | Unit does not attempt to restart on fault | |
| 2:0 | Delay time setting | 000 | No delay supported | 000 |

STATUS_WORD [0x79]

High byte

| Bit number | Purpose | Bit Value | Meaning |
|------------|--|-----------|-------------|
| 7 | An output over voltage fault or warning | 1 | Occurred |
| | | 0 | No Occurred |
| 6 | An output over current fault or warning | 1 | Occurred |
| | | 0 | No Occurred |
| 5 | An input voltage fault, including over voltage and under-voltage | 1 | Occurred |
| | | 0 | No Occurred |
| 4 | Reserved | | |
| 3 | Power_Good | 1 | is negated |
| | | 0 | ok |
| 2:0 | Reserved | | |

Low Byte

| Bit number | Purpose | Bit Value | Meaning |
|------------|---|-----------|-------------|
| 7 | Reserved | | |
| 6 | OFF (The unit is not providing power to the output by OCP OVP OVIN) | 1 | Occurred |
| | | 0 | No Occurred |
| 5 | An output over voltage fault | 1 | Occurred |
| | | 0 | No Occurred |
| 4 | An output over current fault | 1 | Occurred |
| | | 0 | No Occurred |
| 3 | An input under voltage fault | 1 | Occurred |
| | | 0 | No Occurred |
| 2 | A temperature fault or warning | 1 | Occurred |
| | | 0 | No Occurred |
| 1 | Reserved | | |
| 0 | Reserved | | |

MFR_C1_C2_ARA_CONFIG [0xF7]

| Bit number | Purpose | Bit Value | Meaning |
|------------|-------------------|-----------|----------------------------|
| 7:5 | Reserved | 000 | Reserved |
| 4 | Reserved | 0 | Reserved |
| 3:0 | PIN Configuration | 0000 | C2 pin: POWER_GOOD |
| | | 0010 | C2 pin: ON/OFF (Secondary) |

MFR_C2_Configure [0xE0]

| Bit number | Purpose | Bit Value | Meaning |
|------------|----------------------|-----------|--|
| 7:2 | Reserved | 000000 | Reserved |
| 1 | ON/OFF Configuration | 0 | Secondary side on/off pin state when mapped to C2 is ignored |
| | | 1 | AND – Primary and Secondary side on/off |
| 0 | PIN Configuration | 0 | Negative Logic (Low Enable: Input < 0.8V wrt Vout(-)) |
| | | 1 | Positive Logic (High Enable: Input > 2.0V wrt Vout(-)) |

MFR_PGOOD_POLARITY [0xE1]

| Bit number | Purpose | Bit Value | Meaning |
|------------|------------------|-----------|----------------------|
| 7:1 | Reserved | 0000000 | Reserved |
| 0 | Power Good Logic | 0 | Negative PGOOD logic |
| | | 1 | Positive PGOOD logic |

Weight

The ADQ500-48S12-6L(Open Frame) weight is 57.2g.maximum.(46.8g.minmum)

The ADQ500-48S12B-6L(Baseplate) weight is 80.3g.maximum.(65.7g.minmum)

Soldering

Wave Soldering

The product is intended for standard manual or wave soldering.

When wave soldering is used, the temperature on pins is specified to maximum 255 °C for maximum 7s.

When soldering by hand, the iron temperature should be maintained at 300 °C ~ 380 °C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter.

Cleaning of solder joint can be performed with cleaning solvent IPA or simulative.

Record of Revision and Changes

| Issue | Date | Description | Originators |
|-------|------------|---|-------------|
| 1.0 | 09.18.2015 | First Issue | A. Li |
| 1.1 | 01.25.2017 | Update the new P/N ADQ500-48S12B-6LA for NSA.. | K. Wang |
| 1.2 | 03.31.2017 | Update the model number the "ADQ500-48S12B-6LA" can not support PMBus | K. Wang |
| 1.3 | 05.17.2019 | Update product spec | K. Wang |
| 1.4 | 06.21.2019 | Update the ADQ500-48S12B-6LA switch frequency to 140kHz | K. Wang |
| 1.5 | 11.18.2019 | Update a typo | K. Wang |
| 1.6 | 12.13.2019 | 1.Update Rohs 6 to RoHS2.0(2011/65/EU) 2. Add the maximum ripple spec 3. Add a note for ADQ500-48S12B-6LA Cap 4,Update PMBus Description | H. Fang |

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices
Barberry House, 4 Harbour Buildings
Waterfront West, Brierley Hill
West Midlands, DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYNTM
An Advanced Energy Company
www.artesyn.com

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.