

POWER

LCM3000 3000 Watt Bulk Front End

Data Sheet

Total Power: 3000 W
of Outputs: Single
Outputs: 12 to 72 V

SPECIAL FEATURES

- 3000 W output power
- Low cost
- 2.5" x 7.0" x 10.9"
- 15.7 Watts per cubic inch
- Industrial/Medical safety
- -40 °C to 70 °C with derating
- 5 V @ 2 A housekeeping
- High efficiency: 90% typical
- Variable speed "Smart Fans"
- DSP controlled
- Conformal coat option
- ± 25% adjustment range
- V-Programming from 20% to 125%
- VAR configurable to any voltage from a single unit
- Five-year warranty

COMPLIANCE

- EMI Class A, with 6db margin
- IEC 61000 Immunity
- RoHS 2


SAFETY

- UL/cUL Recognized ITE (UL/CSA62368-1)
- UL/cUL Recognized Medical (ANSI/AAMI ES60601-1)
- TUV-SuD ITE + Medical (EN62368-1 and EN60601-1)
- CE LVD (EN62368-1 + RoHS)
- CB Report
 - through Demko for IEC60950-1
 - through TUV-SuD for IEC60601-1
 - through DEMKO for IEC62368-1



Electrical Specifications

| Input | |
|----------------------|--|
| Input range | 90 - 264 Vac (Operating) Derate to 1500 W below 180 Vac input 115/230 Vac (Nominal) TERMINAL BLOCK |
| Frequency | 47-63 Hz, Nominal 50/60 Hz |
| Input fusing | Internal 30 A fuses, both lines fused |
| Inrush current | ≤ 35 A peak, at 110 Vac and <60 A at 230 Vac |
| Power factor | 0.95 typical, meets EN61000-3-2 |
| Harmonics | Meets IEC 1000-3-2 requirements |
| Input current | 20 A RMS max input current, at 100 Vac |
| Hold up time | 14 ms minimum for nominal output voltage, at full rated load |
| Efficiency | > 90% typical at full load / 230 Vac nominal |
| Leakage current | < 500 µA @ 240 Vac |
| ON/OFF power switch | N/A |
| Power line transient | MOV directly after the fuse |
| Isolation | PRI-Chassis 2000VAC / 2828VDC PRI-SEC 3000VAC / 4242VDC 2xMOPP SEC-Chassis 500 Vdc |

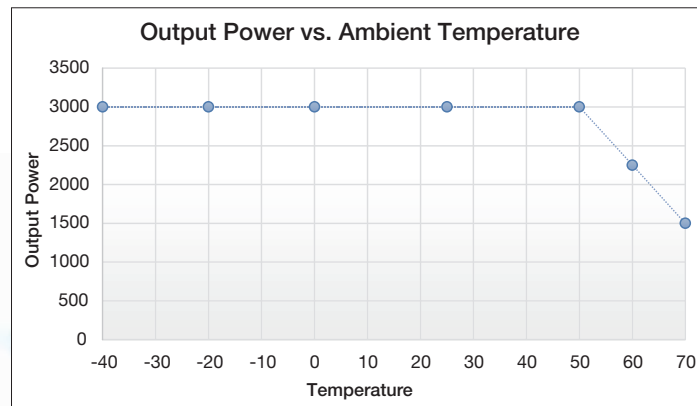

** LCM3000 tested according to the medical standard IEC 60601-1-2 4th Edition.

Electrical Specifications

| Output | | |
|---|---|--|
| Output rating | See table 1 | 90 - 264 Vac (Derate down to 50% below 180 Vac) |
| Set point | ± 0.5% | 90 - 264 Vac |
| Total regulation range | Main output ± 1% 5 Vsb ± 5% | Combined line/load when measured at output terminal |
| Rated load | 3000 W maximum (Derate to 1500 W when input is <180 Vac) | Derate linear to 50% from 50 °C to 70 °C |
| Minimum load | Main output @ 0.0 A 5 Vsb @ 0.0 A | No loss of regulation |
| Output noise (PARD) | 1% max p-p 100 mV max p-p | Main output 5 Vsb output Measured with a 0.1 µF Ceramic and 10 µF Tantalum Capacitor on any output, 20 MHz |
| Output voltage overshoot | < 5% of voltage setting must settle within 300 mSec | Rise is monotonic |
| Transient response | ± 5% of nominal output voltage | 50% load step @ 1 A/µs Note: Consult specification for transient response for loads <10% Step load valid between 10% to 100% of output rating Recovery time to within 1% of set point at onset of transient |
| Max units in parallel | | Up to 8 |
| Short circuit protection | Protected, no damage to occur | Bounce mode |
| Remote sense | | Compensation up to 500 mV |
| Output isolation | | Standard per safety requirements |
| Forced load sharing | To within 10% of all shared outputs | Digital sharing control |
| Overload protection (OCP) – Constant current mode | 105% to 125% 120% to 140% | Main output 5 Vsb output |
| Overvoltage protection (OVP) | 110% to 130% 110% to 125% | Main output 5 Vsb output |
| Overtemperature protection | 10 - 15 °C above safe operating area | Both PFC and output converter monitored |

Environmental Specifications

| | |
|------------------------------|---|
| Operating temperature | -40 °C to +70 °C, linear derating to 50% from 50 °C to 70 °C Operation at -40 °C requires a 5 minute operating warm-up at -20 °C |
| Storage temperature | -40 °C to +85 °C |
| Humidity | 10 to 90%, non-condensing. Operating. Conformal coat option available. |
| Acoustic noise | < 40 dBA, 60% load at 30 °C |
| Altitude | < 80% power derating is required for 5000 m 100% load at 3000 m |
| Shock (Operating) | MIL-STD-810G, method 516.6, Procedure I |
| Vibration (Operating) | MIL-STD-810G, method 514.6, Procedure I, Category 4-11 |



Pin Assignment

| Signals | Name Description | Pin Number(s) |
|----------|---|----------------|
| +Vout | Power rail | SK4 |
| GND | Power GND | SK5 |
| Signals | Name Description | SK2 Pin Number |
| A2 | EEPROM Address | 1 |
| -VPROG | Return connection of external supply for V-Programming from 20% to 125% | 2 |
| A1 | EEPROM Address | 3 |
| -Vsense | Remote Sense Return | 4 |
| ISHARE | Load share voltage | 5 |
| A0 | EEPROM Address | 6 |
| SDA1 | Serial Data Signal (I2C) | 7 |
| +VPROG | Positive connection of external supply for V-Programming from 20% to 125% | 8 |
| SCL1 | Serial Clock Signal (I2C) | 9 |
| +Vsense | Remote Sense Positive | 10 |
| 5VSB | 5V standby | 11 |
| GND | 5V standby Return | 12 |
| 5VSB | 5V standby | 13 |
| G_DCOK_C | Global DCOK Collector | 14 |
| GPIOA6 | EEPROM Write Protect | 15 |
| G_DCOK_E | Global DCOK Emitter (GND) | 16 |
| GND | Return Ground for output signal and I2C communication | 17 |
| G_ACOK_C | Global ACOK Collector | 18 |
| INH_EN | Turn Off Main Output | 19 |
| G_ACOK_E | Global ACOK Emitter (GND) | 20 |

Note: Mating connector for SK2 is:

LANDWIN: PN 2050S2000 Housing and PN 2053T021V Contact

CIVILUX: PN C10120SD000 Housing and PN C101TD21PE0 Contact

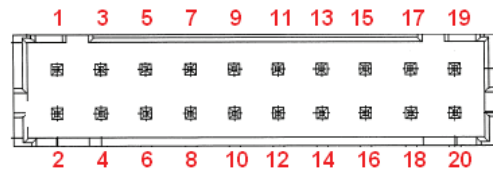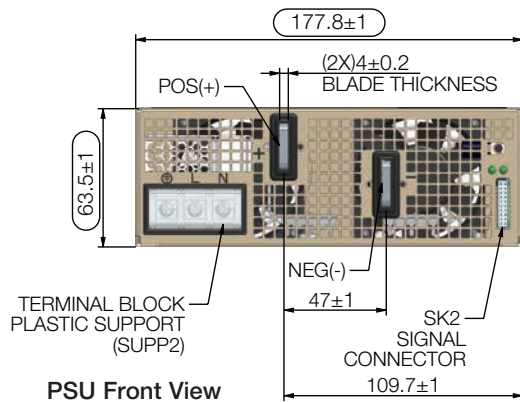

Signal Output Signal Connectors (SK2)

LED INDICATORS

2 provided are clearly visible up to a 45 degree offset from vertical with office environment ambient lighting. The status is reflected in the indicator color.

The DC_OK LED shall light green if the DC output is within specification, and shall be off if the output falls out of specification.

The AC_OK LED is green if the AC is within specification and off when out of specification.

CONTROL SIGNALS

AC_OK Open collector 0.5 V maximum at 10 mA. Both emitter and collector access provided.

DC_OK Open collector 0.5 V maximum at 10 mA. Both emitter and collector access provided.

PS_INHIBIT/ENABLE Signal 0.0 - 0.5 V contact closure, output OFF; Option code "A" = 0.0 - 0.5 V or contact closure, output ON

Ordering Information Table 1

| Model Number* | Nominal Output Voltage Set Point | Adjustment Range | | Max I (3000 W) | Max I (1500 W) | Output Ripple P/P (0-50 °C) | Combined Line/Load Regulation | Trim Range ± 25% | "Vprog Adjustment" 0 V to 6 V (20% to 125% Vout) |
|---------------|----------------------------------|------------------|--------------------|----------------|----------------|----------------------------------|-------------------------------|------------------|--|
| | | Max I | Max Power (3000 W) | | | | | | |
| LCM3000L-T | 12 V | 2.4 V - 12 V | 12 V - 15 V | 250 A | 125 A | 150 mV OR 1% whichever is higher | 1% | 9 V - 15 V | 2.4 V - 15 V |
| LCM30008-T | 18 V | 3.6 V - 18 V | 18 V - 22.5 V | 166.7 A | 83.3 A | 180 mV OR 1% whichever is higher | 1% | 13.5 V - 22.5 V | 3.6 V - 22.5 V |
| LCM3000Q-T | 24 V | 4.8 V - 24 V | 24 V - 30 V | 125 A | 62.5 A | 240 mV OR 1% whichever is higher | 1% | 18 V - 30 V | 4.8 V - 30 V |
| LCM3000U-T | 36 V | 7.2 V - 36 V | 36 V - 45 V | 83.3 A | 41.7 A | 360 mV OR 1% whichever is higher | 1% | 27 V - 45 V | 7.2 V - 45 V |
| LCM3000W-T | 48 V | 9.6 V - 48 V | 48 V - 60 V | 62.5 A | 31.3 A | 480 mV OR 1% whichever is higher | 1% | 36 V - 60 V | 9.6 V - 60 V |
| LCM30007-T | 72 V | 14.4 V - 72 V | 72 V - 90 V | 41.7 A | 20.8 A | 720 mV OR 1% whichever is higher | 1% | 54 V - 90 V | 14.4 V - 90 V |

Notes:
 (1) Minimum Current is (0)
 (2) Set Point Tolerance is ±0.5%
 (3) outputs above 60 Vdc are not SELV rated.


Ordering Information Table 2

| LCMXXXXY | - | A | - | B | - | ### |
|----------------------------------|----|--------------------|---|--------------------------------------|---|---|
| Case Size | | Input Termination | | Option Codes* | | Hardware Code |
| 1-Phase input where XXXX = | | | | | | |
| 3000 = 2.5" x 7.0" x 11", 3000 W | | | | Blank = No Options | | Factory Assigned for Modified Standards |
| | | T = Terminal Block | | 1 = Conformal Coat | | |
| Voltage Code Y = | | | | 2 = Reverse Air | | |
| Code | | | | 3 = Opt 1 + 2 | | |
| L | 12 | | | A = Reverse Logic for Inhibit/Enable | | |
| 8 | 18 | | | | | |
| Q | 24 | | | | | |
| U | 36 | | | | | |
| W | 48 | | | | | |
| 7 | 72 | | | | | |

*Some option code combinations may not be configured yet and will require extra leadtime the first time they are requested.

Mechanical Drawings (LCM3000 Series - All Voltages)

Unit weight: 3.7 Kg

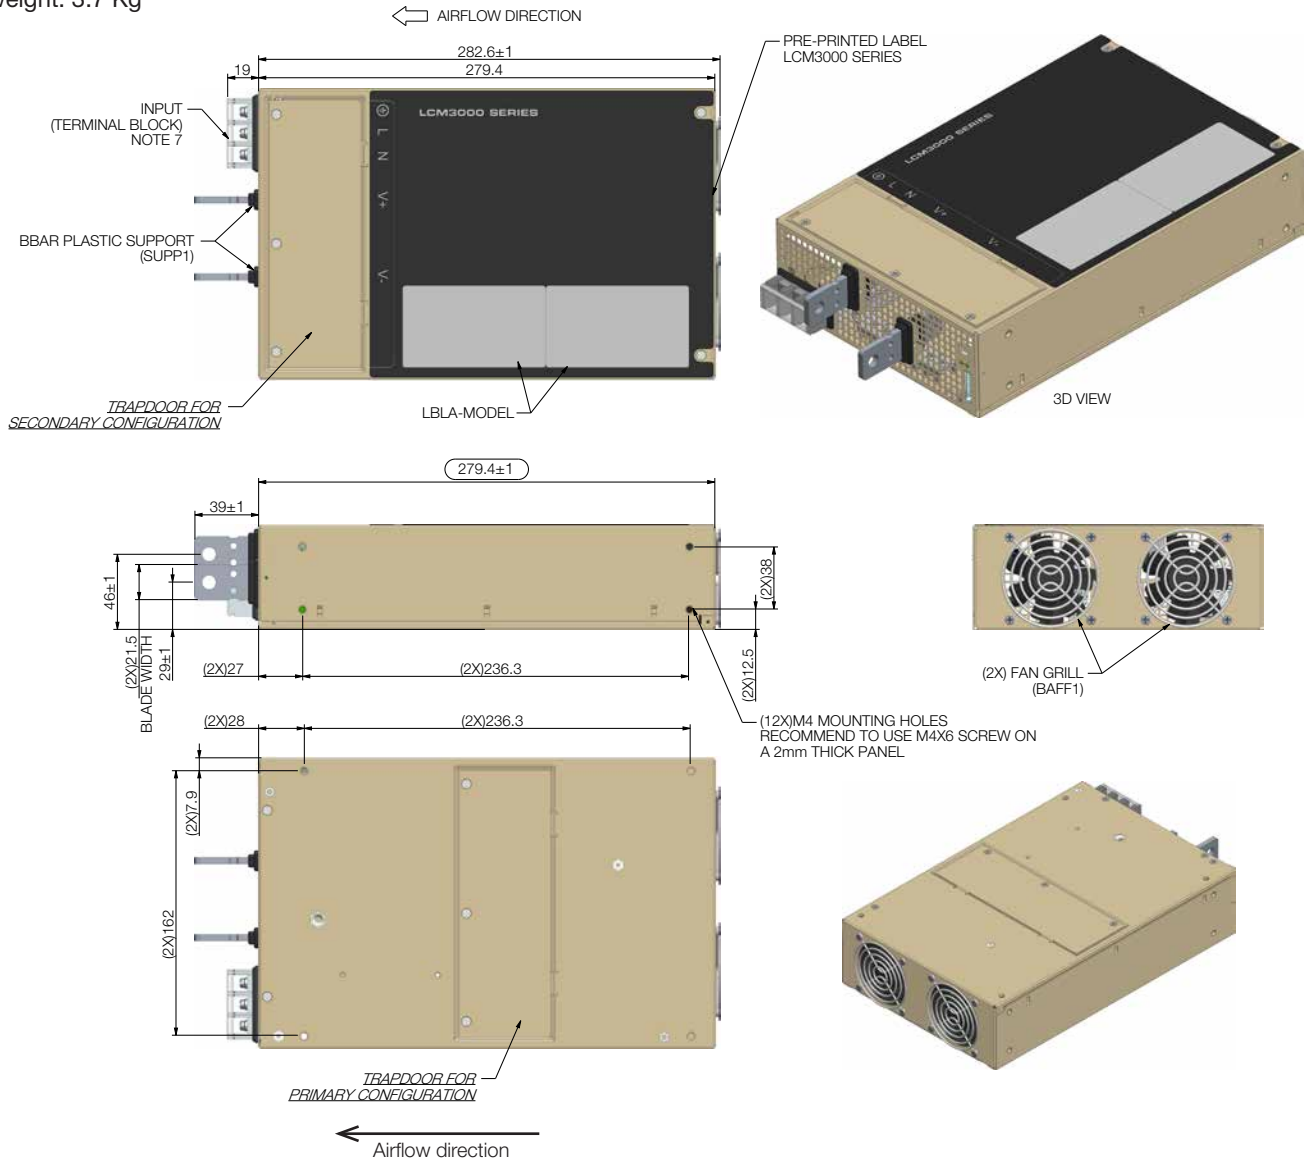

RECOMMENDED SCREW TORQUE:

- M3.5 x 0.6P = 6 - 8 kgf-cm
- M4.0 x 0.7P = 8 - 10 kgf-cm


INPUT TERMINAL BLOCK:

- M4.0 screw with recommended torque of 16 kgf-cm
- Recommended wire gage 18-10 (13 mm centers)

SUITABLE MATING CONNECTORS:


- HSG-DR 20CKT (Landwin P/N: 2050S2000) or (Civlux P/N: CI0120SD00)
- TERM-#22-28 (Landwin P/N: 2053T021V) or (Civlux P/N: CI01TD21PE0)

Note: For customer mounting, Dimension should be from external surface. Max screw protrusion will be 4.5mm (1.0mm chassis thickness)


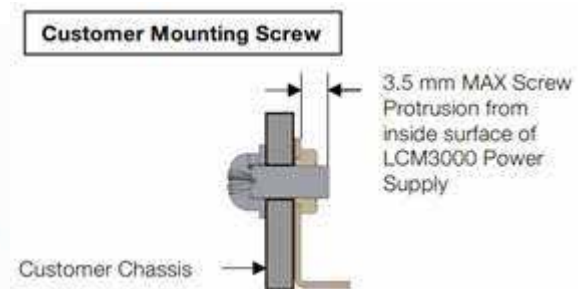


Trimming Resistor location


A precision screw with positive (+) point should be used on the trimmer.
Rotating in clockwise direction will increase the voltage set point. Access must be from the front panel.

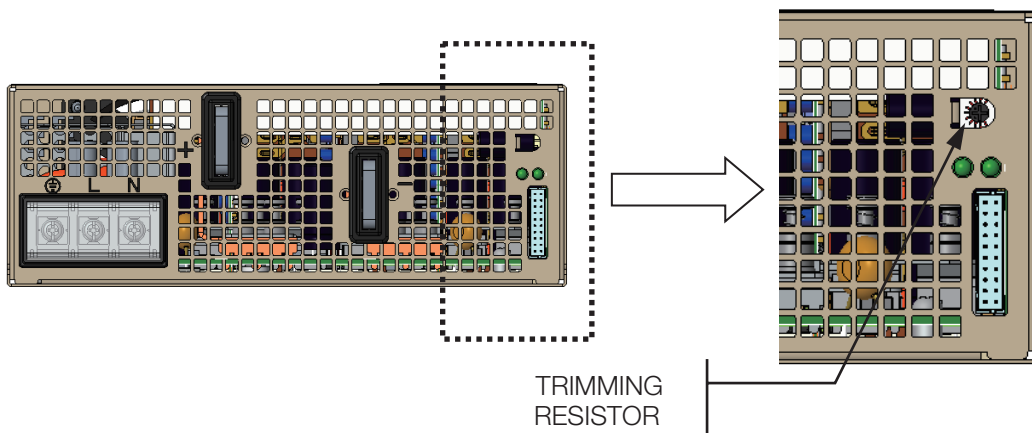


Customer Mounting Screw

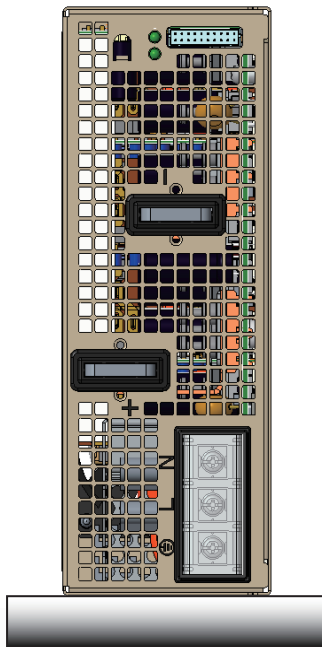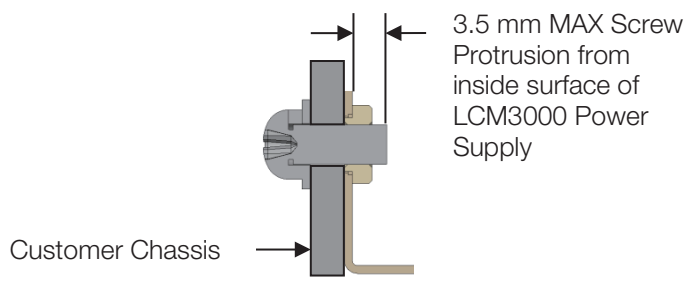

MOUNTING "A"

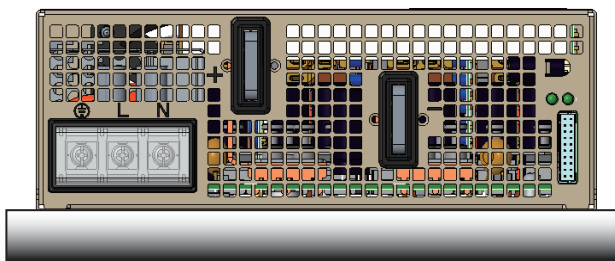


MOUNTING "B"

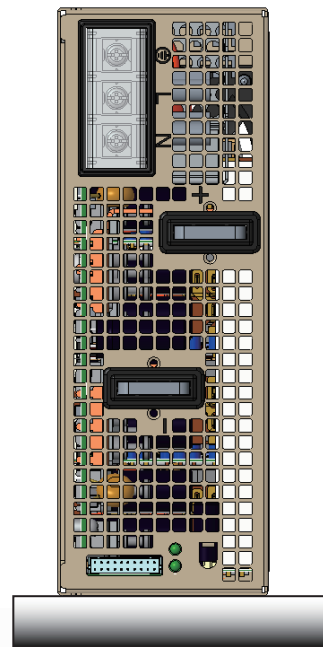


MOUNTING "C"

Accessories

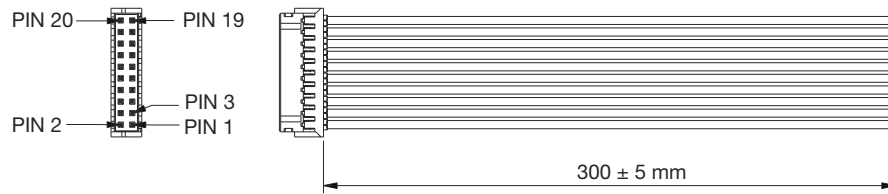

Order kit part number 73-788-001 for control connector interface with 0.3 m wires attached

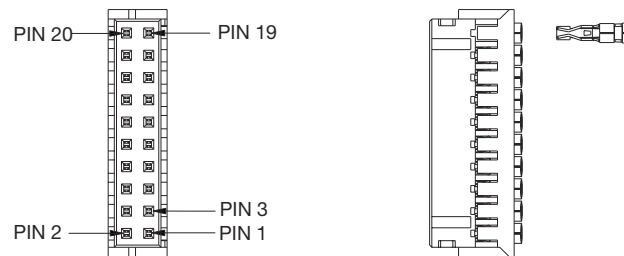

Order kit part number 73-788-002 for control connector interface with unloaded housing and 20 pins

Miscellaneous Specifications

BURN-IN

100% Burn-in at 45 °C, at 80 - 90 % load. Duration of burn-in determined by Quality Assurance Procedures.

MTBF

The power supply has a minimum MTBF of 200K hours using the Telcordia 2 Method, with specifications @ 25 °C, ambient, at full load. With the power supply installed in a system in a 35 °C ambient environment and operating at full load, capacitor life shall be 5 years, minimum for ALL electrolytic capacitors contained within this power supply. The power supply shall demonstrate an MTBF level of > 500,000 hours based on actual field population operational hours.

QUALITY ASSURANCE

Full QAV testing shall be conducted in accordance with Artesyn Embedded Power Standards with reports available upon request.

WARRANTY

Artesyn Embedded Power shall warrant the power supply to be free of defects in materials and workmanship for a minimum period of five (5) years from the date of shipment, when operated within specifications. The warranty shall be fully transferable to the end owner of the equipment powered by the supply.

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN[™]
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2020 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com