

COMX-T2081 COM Express Module

Data Sheet

QorIQ processing power on a module for rapid deployment across diverse I/O requirements

- NXP T2081 high performance e6500 CPU core
- Soldered down 8G DDR3L ECC memory
- 10/100/1000 BASE-T, SGMII and PCIe interfaces to carrier board
- Rugged design to support extended operating temperature and vibration
- Basic size form factor (95 mm x 125 mm)
- Linux 4.1 kernel and NXP® QorIQ® SDK 2.0
- Longevity of supply
- Global technical support




COM  Express®

Leveraging industry-leading expertise in developing NXP® Power Architecture based COM Express modules, Artesyn Embedded Technologies further strengthens its extensive portfolio with newly launched COMX-T2081 module. Beyond the heritage of longevity of supply and superior performance/power rating, the NXP T2081 processor brings a wide spectrum of high speed interfaces, enabling COMX-T2081 as an ideal, cost-effective commercial off-the-shelf (COTS) solution to serve a broad market where processing density, technology migration and long lifecycle takes priority.

As a highly integrated single board computer, the Computer-on-Module (COM) form factor offers computer core processing capability on a compact footprint and generally pairs with a carrier board that functions as an infrastructure facility to provide power and peripheral connectors. The separation of design for a carrier board effectively enhances the modularity of COM form factor. It is the modularity that provides a great level of flexibility for processor selection and makes it easy to upgrade a COM without requiring a redesign of a specialized carrier board, allowing system integrators to focus on the differentiation of end applications, reduce development cost, shorten development cycle, and therefore speed time to market. With its advantages on density, modularity, scalability and “future proofing” attribute, the COM form factor plays a highly important role in the COTS market and enables a broad range of applications spanning telecom, networking, aerospace, military/defense, industrial automation and medical.

Nowadays, COM products are being widely adopted by system developers to address the burgeoning Internet of Things (IoT) market opportunities as it represents a natural fit for applications requiring low power consumption and small physical size. Embedded in various mission-critical systems, COM is also one of prevalent form factors that deliver processing engines to drive Industry 4.0 implementations. A recent market study shows that COM products take the largest share of the overall embedded computing market worldwide and it will grow at the highest Compounded Annual Growth Rate (CAGR) for the next five years. Among the different specifications of the COM form factor, COM Express is becoming the most popular as it is defined to deliver a high performance with a series of high speed interfaces.

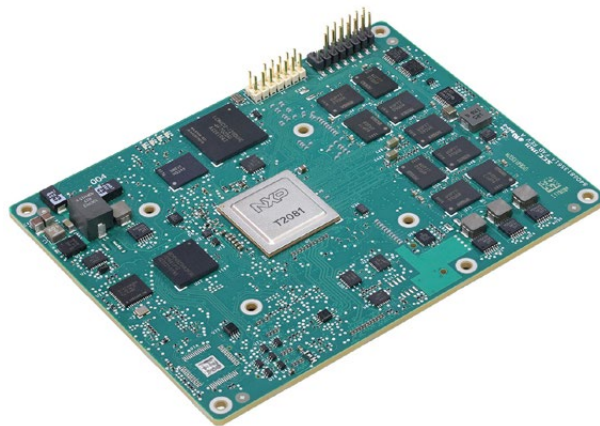

ARTESYN'S LEADING POSITION IN POWER ARCHITECTURE

As a significant contributor to PICMG® and a strategic partner of NXP, Artesyn has developed unmatched expertise in designing industry-leading COM Express products and has built one of the most extensive Power Architecture based COM Express portfolios. The products built on advanced technology, consistent focus, supply longevity and superior quality have positioned Artesyn as a long-standing, trusted supplier for highly demanding applications in both commercial and military/defense markets. Designed for Basic size form factor (95 mm × 125 mm) and Type 5/6 pin-outs with NXP extensions/modifications, the newly launched QorIQ T-series based COMX-T2081 module further enhances Artesyn's Power Architecture COM Express portfolio, and provides customers with technology insertion to either handle a product migration smoothly or take on a green-field project effectively. Artesyn's COMX-T2081 module is designed to meet the stringent requirements on a harsh operating environment with its rugged design supporting extended temperature and vibration.


With its Altivec engine and architecturally innovative dual-threaded e6500 core offering a high performance/watt rating, NXP's T2081

processor is primarily intended to succeed the successful QorIQ P-series mid-range series of quad-core devices as a control plane or integrated control and data plane processor. T2081 is designed to deliver maximum benefit for mid-range applications as it outperforms the previous generation in core capability, cache size and SerDes bandwidth, within a similar power budget.

The COMX-T2081 module adheres to Artesyn's scalable product strategy by providing system developers with multiple performance levels. The implementation flexibility makes the module suitable for a range of applications including enterprise and service provider routers, switches, base-station controllers, radio network controllers (RNCs), long-term evolution (LTE) and general-purpose embedded computing systems in the networking, telecom, wireless infrastructure, industrial automation, aerospace, and military/defense markets. And importantly, the sought-after longevity of supply of NXP Power Architecture processors enables customers to handle long lifecycle programs and maximize the return on their investment.



COMX-T2081 Block Diagram

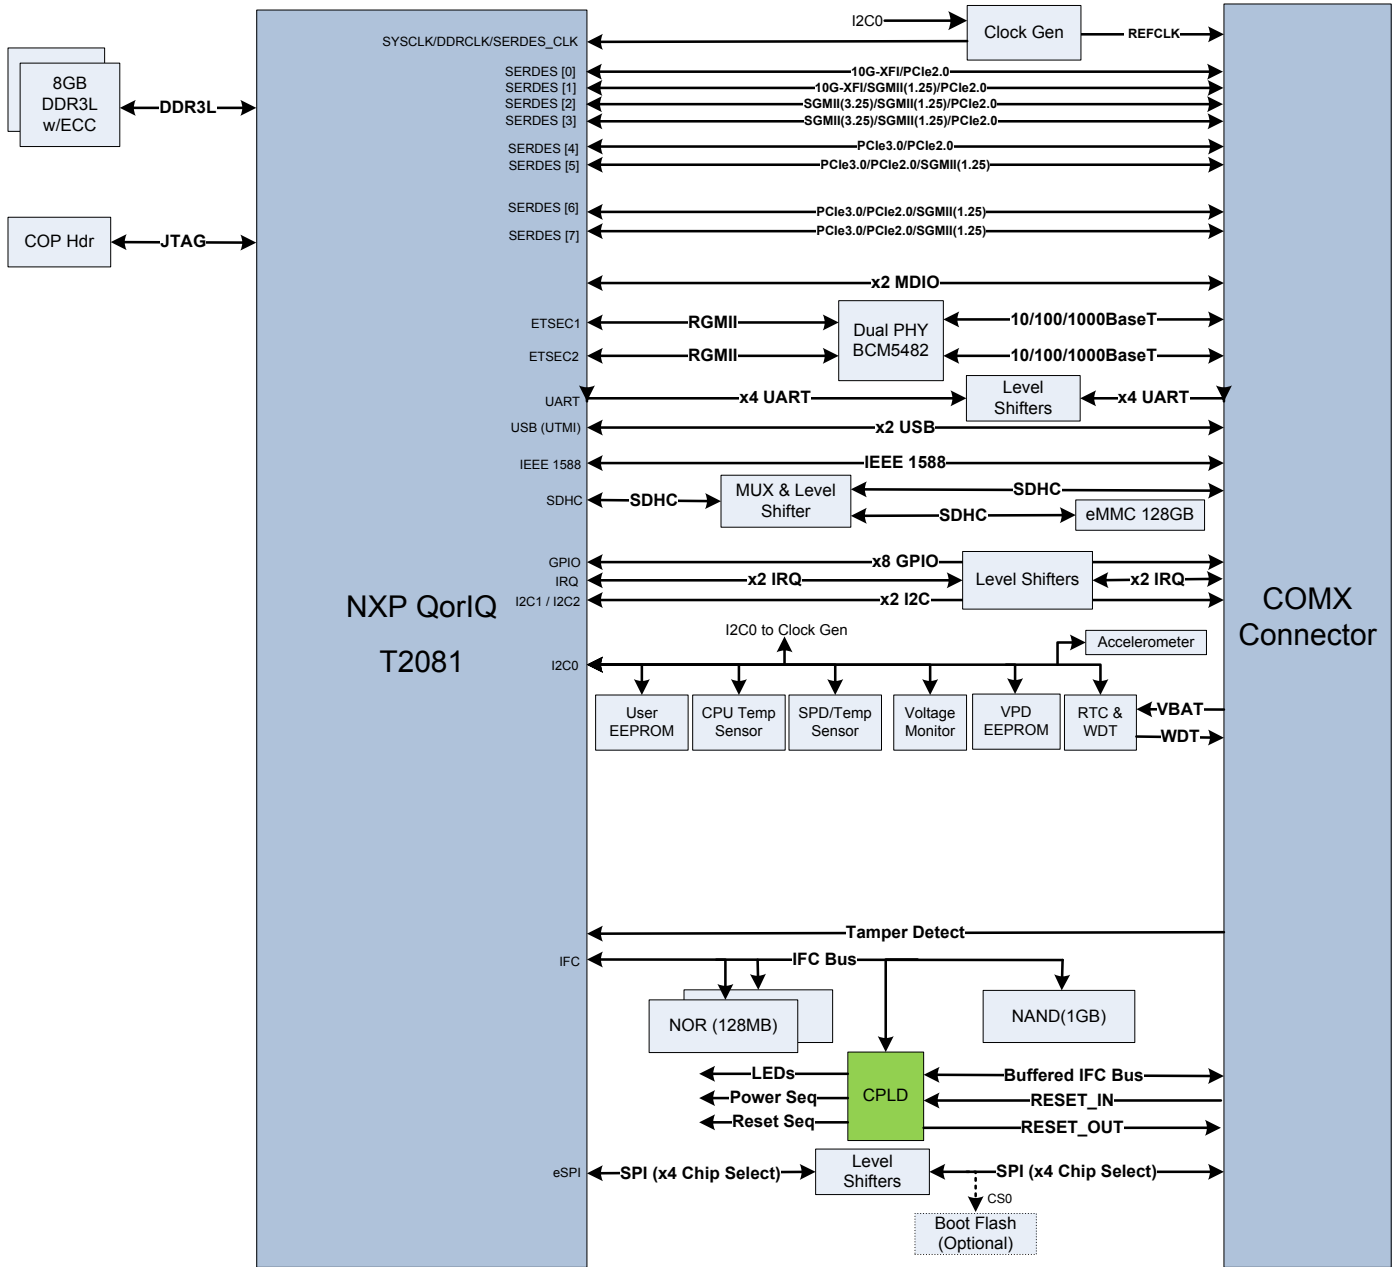

Hardware Specifications

PROCESSOR

- NXP QorIQ T2081, dual threaded quad cores (SEC) running at 1.5 GHz

FORM FACTOR

- Basic size 95 mm x 125 mm

BOOTLOADER

- U-boot

MEMORY

- Soldered down dual-bank 8GB DDR3L-1866 ECC

ON-BOARD STORAGE

- Two (2) redundant 128MB NOR flash
- 128GB eMMC
- 1GB NAND flash
- 512KB EEPROM

ON-BOARD I/O

- JTAG/COP debug

SERDES I/O TO THE CARRIER

Eight (8) configurable SERDES lanes available for maximum flexibility in customer platform design. Lane protocols are configurable. The user can select any of the combinations supported by the T2081. Available interfaces include:

- Up to six (6) 1GbE SGMII
- Up to two (2) 2.5GbE SGMII
- Up to two (2) 10GbE XFI/KR*
- Up to four (4) PCI Express 2.0 (X1)
- Up to one (1) PCI Express 2.0 (X2)
- Up to two (2) PCI Express 2.0 (X4)
- Up to one (1) PCI Express 3.0 (X1 or X4)

*XFI routed to the module connector has not been fully tested. Please refer to the related product documentations or contact regional sales managers for more information.

OTHER I/O AT THE CONNECTOR

- Up to two (2) 10/100/1000Base-T
- Up to two (2) MDC/MDIO
- Four (4) UART ports
- One (1) SDHC interface
- Eight (8) GPIO ports
- Two (2) I²C bus
- Two (2) USB 2.0 ports
- IEEE 1588 control
- Tamper detection
- Real-time clock
- Watchdog timer
- SPI Bus with four (4) chip selects
- One (1) Integrated Flash Controller (IFC) bus

ACCESSORIES

- Heatsink, fansink, heat spreading plate, development carrier

COMPLIANCE AND CERTIFICATION INFORMATION

- RoHS 6/6
- UL/CSA 60950-1, EN55022, FCC Class B

Firmware and Operating System Support

OS SUPPORT

- Linux 4.1 kernel and NXP QorIQ SDK 2.0
- Wind River VxWorks 7.0 AMP and SMP
- Green Hills INTEGRITY (Optional and based on customer demand)

Environmental

<i>Ruggedization Level</i>	ENP2
Cooling Method	Forced Air
Operating Temperature	-40 °C to +71 °C
Storage Temperature	-50 °C to +100 °C
Vibration Sine (10min/axis)	5G, 15 to 2000Hz
Vibration Random (1hr/axis)	.04g ² /Hz, 15 to 2000Hz (8GRMS)*
Shock	30g/11mS
Humidity	to 95%/100% RH**
Conformal Coating	Option (Acrylic or Urethane)
Altitude	-1,500 to 30,000 ft

*Flat 15-1000Hz, -6db/octave 1000Hz – 2000Hz [MIL-STD 810F Figure 514.5C-17]

**Up to 95% RH, non-condensing for non-conformal coated variants; up to 100% RH with certain conformal coatings

Ordering Information

<i>Product</i>	<i>Description</i>
COMX-T2081-01	COM Express module based on NXP T2081 at 1.5 GHz, 8GB soldered down DDR3L ECC, Basic size, ENP2 ruggedization level
COMX-CAR-P1	Carrier board for NXP® QorIQ® processors based COM Express modules
COMX-TXXXX-HSP	Heat spreading plate for COMX-T2081 module
COMX-TXXXX-HTSNK	Heatsink for COMX-T2081 module
COMX-TXXXX-FANSNK	Fansink for COMX-T2081 module

SOLUTION SERVICES

Artesyn Embedded Technologies provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh.

WORLDWIDE OFFICES

United States	+1 888 412 7832	Japan	+81 3 5403 2730
Hong Kong	+852 2176 3540	Korea	+82 2 6004 3268
China	+86 400 8888 183		



www.artesyn.com